

Dreame X50 Master

DREAME

with Auto Water Refilling and Draining

Robot Vacuum and Mop with Auto-Empty and Mop Self-Cleaning
User Manual

The illustrations in this manual are for reference only. Please refer to the actual product.



Contents

EN	User Manual	1
TR	Kullanıcı Kilavuzu	42
VI	Hướng dẫn sử dụng	83
TH	คู่มือการใช้งาน	124
ID	Panduan Pengguna	165

Safety Information

To avoid electric shock, fire or injury caused by improper use of the appliance, please read the user manual carefully before using the appliance and keep it for future reference.

Usage Restrictions

- This product should not be used by children younger than 8 years old nor persons with physical, sensory, intellectual deficiencies, or limited experience or knowledge without the supervision of a parent or guardian to ensure safe operation and to avoid any risks. Cleaning and maintenance shall not be performed by children without supervision.
- The appliance is only to be used with the power supply unit provided with the appliance.
- This appliance contains batteries that are only replaceable by skilled persons.
- Keep the area around the product and the cabinet where the product is embedded well ventilated.
- After installing this product, make sure the power plug is within easy reach.
- Clear the area to be cleaned. Children shall not play with the appliance. Ensure children and pets are kept at a safe distance from the robot while it is operating.
- Do not install, charge or use the appliance in the bathrooms or around the pools.
- This product is for floor cleaning in a home environment only. Do not use it outdoors, on non-floor surfaces, or in a commercial or industrial setting.
- Ensure that the appliance operates correctly in a proper environment. Otherwise, do not use the appliance.

Safety Information

Usage Restrictions

- If the power cord is damaged, it must be replaced by a special cord or assembly available from the manufacturer or its service agent.
- Do not use the robot in an area suspended above ground level without a protective barrier.
- Do not place the robot upside down. Do not use the LDS cover, robot cover, or bumper as a handle for the robot.
- Use the robot in environments with an ambient temperature above 0°C and below 40°C. Make sure there is no liquid or sticky substance on the floor.
- To prevent damage or harm from dragging, clear any loose objects from the floor, and remove cables or power cords on the cleaning path before operating the appliance.
- Remove fragile or small items from the floor to prevent the robot from bumping into and damaging them.
- Keep hair, fingers, and other body parts away from the suction opening of the robot.
- Keep the cleaning tool out of reach of children.
- Do not operate the appliance in a room where an infant or child is sleeping.
- Do not place children, pets, or any item on top of the robot regardless of whether it is stationary or moving.
- Only clean water and the officially-approved cleaning solution can be added to the clean water tank. Do not add any other liquid such as alcohol or disinfectant. The ratio of the cleaning solution to clean water can be checked

Safety Information

Usage Restrictions

on the cleaning solution bottle. Keep the cleaning solution out of reach of children.

- Do not use the robot to clean any burning objects. Do not use the robot to pick up flammable or combustible liquids, corrosive gases, or undiluted acids or solvents.
- Do not vacuum hard or sharp objects. Do not use the appliance to pick up objects such as stones, large pieces of paper or any item that may clog the appliance.
- Plug must be removed from the socket-outlet before cleaning or maintaining the appliance.
- Do not wipe the robot or the base station with a wet cloth or rinse them with any liquid. After cleaning washable parts, fully dry the parts before reinstalling and using them.
- This product should be connected to the water source using the new pipe assembly included in the package. Do not reuse the old pipe assembly.
- Before installing or disassembling the water hookup accessories, make sure that the base station is not connected to the power supply.
- Please keep the disassembled package properly and do not allow children to touch or swallow it.
- Please do not disassemble, repair or modify this product. If any problem occurs, please contact the after-sales service team.

Safety Information

Usage Restrictions

- When this product needs to be transported, please empty the remaining water first, and it is recommended to use the original packaging.
- Please use this product in accordance with the instructions in the User Manual. Users are responsible for any loss or damage that arise from improper use of this product.

Batteries and Charging

- Do not use any third-party battery or base station. The robot can only be used with the model RBXE0307 base station.
- Do not attempt to disassemble, repair, or modify the battery or the base station on your own.
- Do not place the base station near a heat source.
- Do not use a wet cloth or wet hands to wipe or clean the base station's charging contacts.
- Do not improperly dispose of old batteries. Unneeded batteries should be discarded at an appropriate recycling facility.
- If the power cord becomes damaged or broken, stop using it immediately and contact after-sales service.
- Make sure the robot is turned off when being transported and kept in its original packaging if possible.
- If the robot will not be used for an extended period of time, fully charge it, then turn it off and store it in a cool, dry place. Recharge the robot at least once every 3 months to avoid over-discharging the battery.

Safety Information

Laser Safety Information · The laser sensor in this product meets the IEC 60825-1:2014/EN 60825-1:2014/A11:2021 Standard for Class 1 laser products. Please avoid direct eye contact with it during use.

CLASS 1 LASER PRODUCT

CONSUMER LASER PRODUCT

EN 50689:2021



For indoor use only




Read operator's manual

Hereby, Dreame Trading (Tianjin) Co., Ltd. declares that the radio equipment type RLX86CE is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <https://global.dreametech.com>
For detailed e-manual, please go to <https://global.dreametech.com/pages/user-manuals-and-faqs>


Product Overview

Package Contents




Robot

Other Accessories



Power Cord




Washboard Filter
(pre-installed)




Dust Bag x 2
(pre-installed x 1)



Auto-Detergent Compartment
(pre-installed)



Base Station



Mop Pad x 2
(pre-installed)




Mop Pad Holder x 2



Cleaning Tool



Cleaning Solution




User Manual

Product Overview

Water Hookup Accessories for Auto Refilling and Draining



1/4" Clean
Water Pipe




3/8" Used
Water Pipe



Spiral Cable Wrap




Wire Organizer



3-Way Diverter Valve



1/4" Elbow (thin) × 2
(pre-installed × 1)



3/8" Elbow (thick) × 2
(pre-installed × 1)



1/4" Cap × 2
(pre-installed)



3/8" Cap × 2
(pre-installed)




1/4" Connection
Locking Clip (small) × 4



3/8" Connection
Locking Clip (big) × 4

Product Overview

Robot

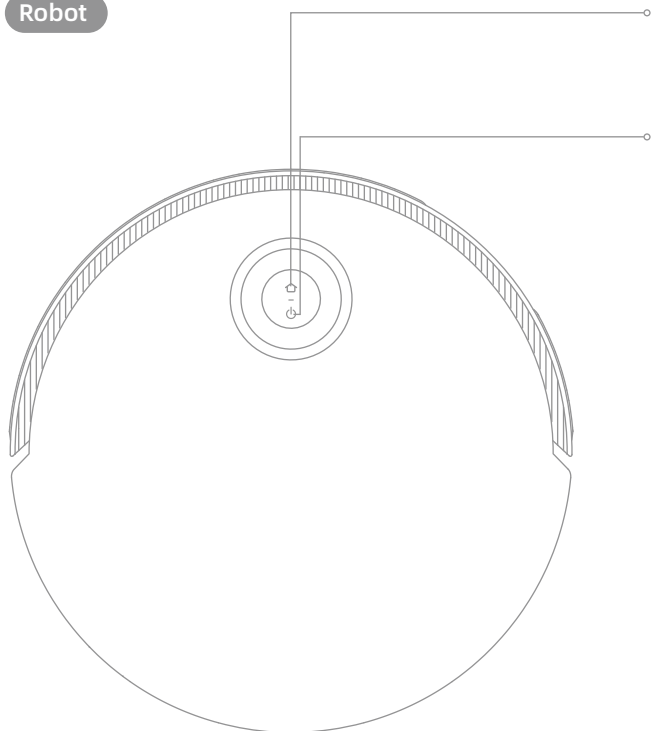

🏠 Dock Button

- Press to send the robot back to the base station
- Press and hold for 3 seconds to disable Child Lock

⏻ Power / Clean Button

- Press and hold for 3 seconds to turn on or off
- Press to start cleaning after the robot is turned on

🕒 Circular Status Indicator

- Solid Blue: Cleaning or cleanup completed
- Solid Green: Charging
- Blinking Orange: Error

🕒 Button Status Indicator


- Solid White: Cleaning or cleanup completed
- Breathing White: Charging (not low battery)
- Solid Orange: Awaiting at low battery or paused at low battery
- Breathing Orange: Charging (low battery)
- Blinking Orange: Error
- Blinking Pink: Camera activated

Note:

- Press any button on the robot to pause while the robot is cleaning or returning to charge.
- Child Lock can be enabled/disabled through the Dreamehome App.

Product Overview


Robot and Sensors

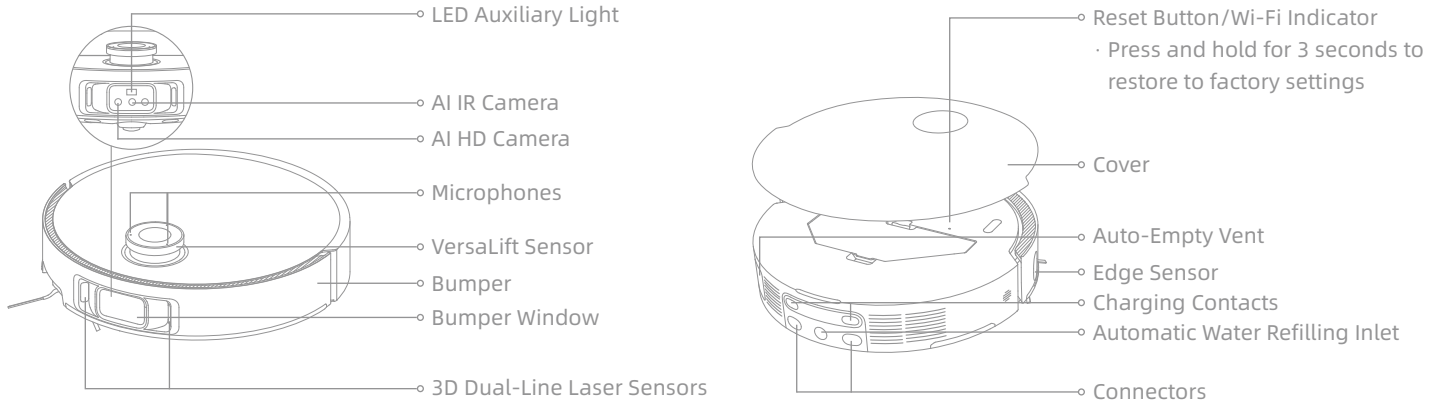


Note: The VersaLift sensor will be lowered when the robot is awaiting, charging on the base station, or cleaning low-clearance areas. In the case of cleaning low-clearance areas, do not move the robot as it may affect its positioning.

Product Overview


Robot and Sensors

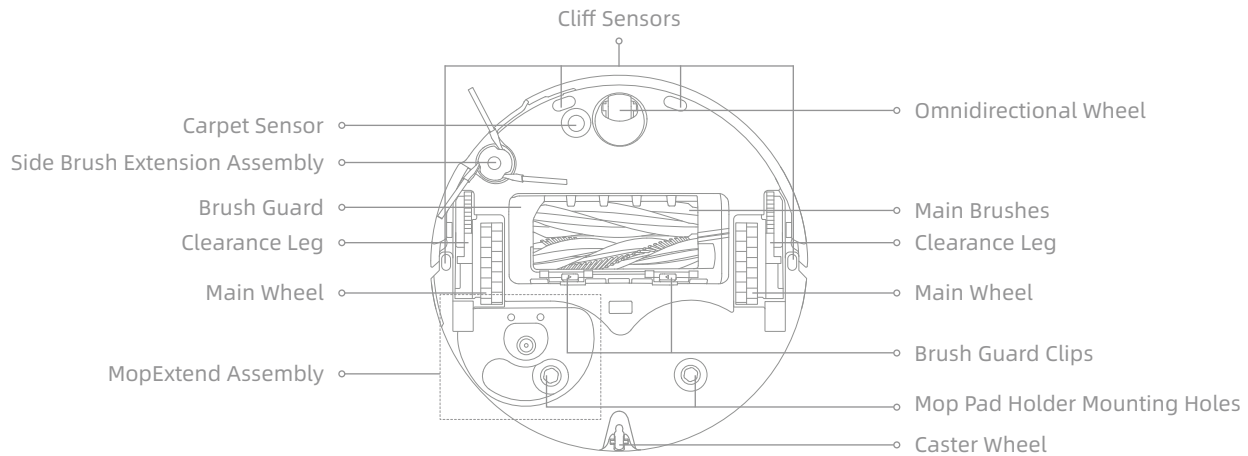

Dust Box

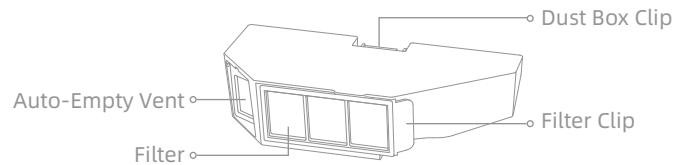


Mop Assembly

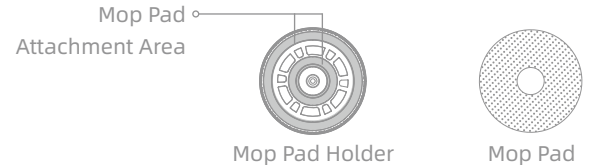

Product Overview


Base Station

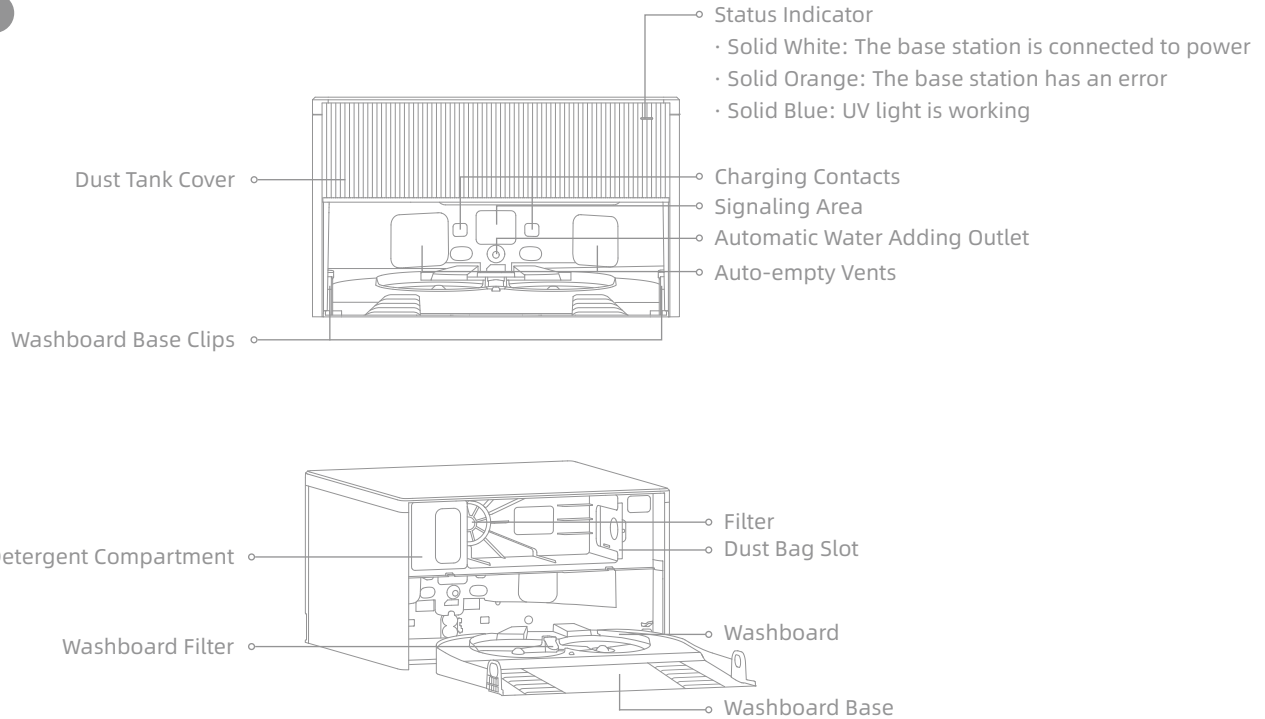

Note: A pair of anti-leakage caps are pre-installed inside of the dust tank cover as a backup.

Product Overview

Base Station

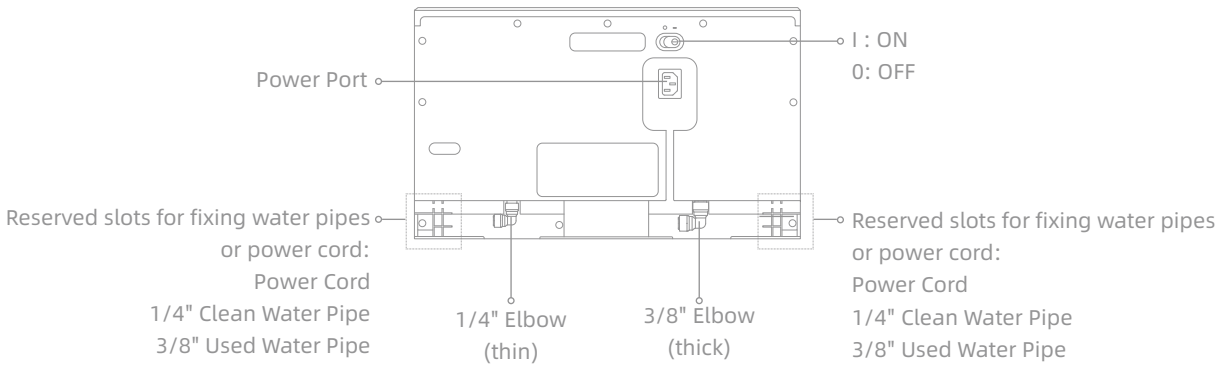


Note:

- Before installing the water pipe, be sure to forcefully press the snap ring at the elbow to remove the anti-leakage cap.
- It is recommended that the installation height of the used water pipe should not be higher than 80 cm.

Before Use

1. Install Water Hookup Accessories for Auto Refilling and Draining


After confirming the appropriate installation location, close the main water valve or angle valve in your home and install the water hookup accessories for auto refilling and draining in place.

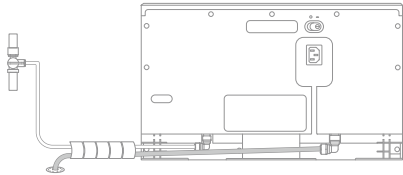

Note: The completed installation is for reference only. Please refer to the actual installation situation.

2. Place the Base Station and Connect to an Electrical Outlet



Remove any objects that are closer than 60 cm from the front of the base station. Firmly insert the power cord until the indicator turns on.

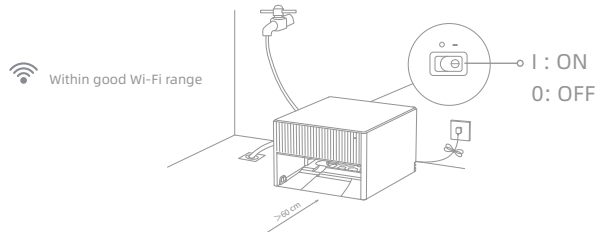

Note:

- Make sure that no objects might block the signaling area.
- To prevent water stains from wetting wood floors or carpets, placing the base station on tile floors or marble floors is recommended.

3. Remove Robot Protections and Install Mop Assembly

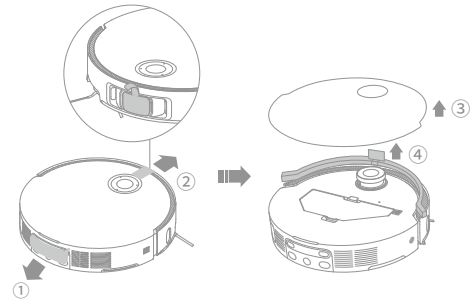


Before Use

4. Connect the Robot to the Base Station

Press and hold the power button on the robot for 3 seconds to turn it on. Place the robot onto the base station with the mop assembly facing toward the washboard. Then you will hear a voice notification when the robot successfully connects to the base station.

After the robot is fully charged, the status indicators on the robot and the base station will remain lit for 10 minutes and then dim.



Note: It is recommended to fully charge the robot before its first use. When the robot cannot be turned on after the battery is depleted, manually connect the robot with the base station to charge it.

5. Test the Installation Effect

Use the Dreamehome App to test whether the base station can successfully perform auto water refilling and draining.

Note: Before using the app, please make sure the robot has been connected. For specific steps, please refer to the "Connecting with the Dreamehome App" section.

6. Add the Cleaning Solution


- (1) Remove the dust tank cover and pull out the auto-detergent compartment.
- (2) Open the upper lid of the compartment and add the cleaning solution.
- (3) Close the lid of the compartment, put it back into the base station, and then reinstall the dust tank cover. The cleaning solution will be added automatically while working.




Note:

- The auto-detergent compartment can be filled up with cleaning solution for use. Do not add any liquid other than the officially-approved cleaning solution to help prevent malfunction.
- Install the auto-detergent compartment until it clicks into place.


Preparing Your Home

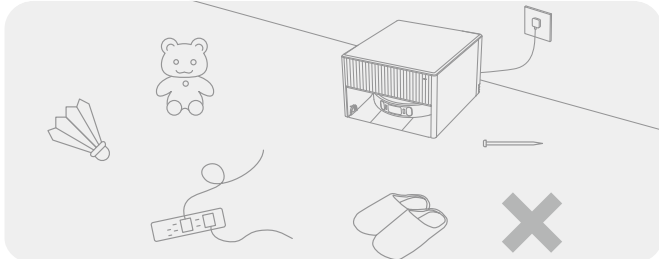

Before cleaning, please move away unstable, fragile, valuable or dangerous items, and clean up cables, cloths, toys, hard objects and sharp objects on the ground to avoid being entangled, scratched or knocked over by the robot and causing losses.

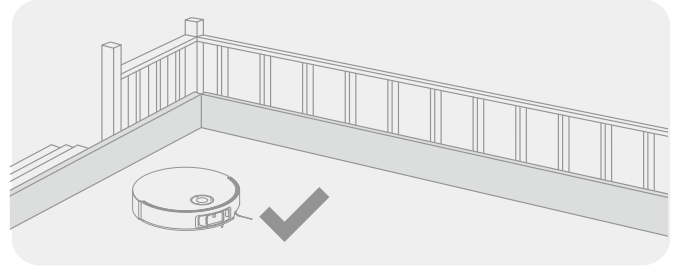


Before cleaning, place a physical barrier at the edge of the stairs to ensure the secure and smooth operations of the robot.

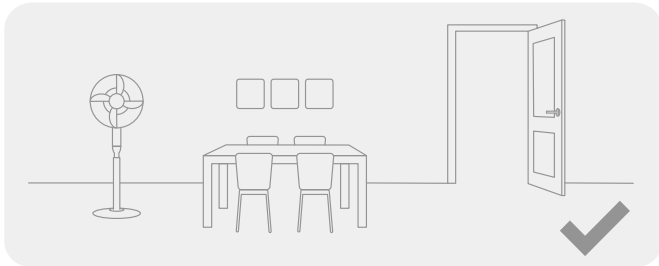

Open the door of the room to be cleaned, and put the furniture in its proper place to leave more space.

Note:

- When operating the robot for the first time, follow it around while cleaning to remove any potential obstacles in time.
- LED auxiliary lights will provide auxiliary lighting in dimly lit environments.
- Do not vacuum hard objects like stones, steel balls and toy parts, or sharp objects like construction waste, broken glass and nails, otherwise the ground may be scratched.

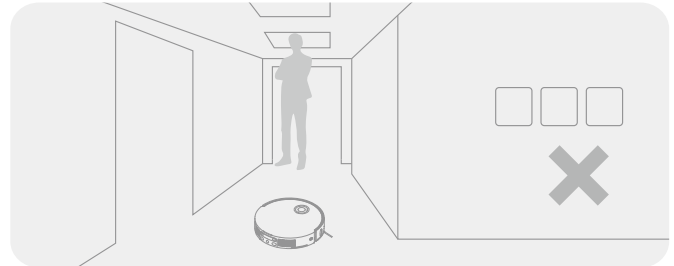


To prevent the robot from missing areas that need to be cleaned, do not stand in front of the robot, threshold, hallway, or narrow places.

Connecting with the Dreamehome App

1. Download the Dreamehome App

Remove the robot cover and scan the QR code on the robot, or search "Dreamehome" in the app store to download and install the app.

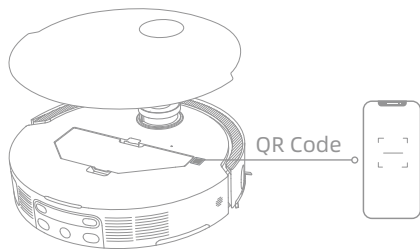

Note:


- Only 2.4 GHz Wi-Fi is supported.
- Due to upgrades in the app software, the actual operations may differ from the directions in this manual. Please follow the instructions based on the current app version.

2. Add Device

Open the Dreamehome app, tap "Scan QR code to connect", and scan the same QR code on the robot again to add the device. Please follow the prompts to finish the Wi-Fi connection.

Note:

- To reset Wi-Fi, repeat step 2 and then follow the prompts to finish the Wi-Fi connection.
- To disconnect the device from Wi-Fi network, press and hold the Reset button on the robot for 3 seconds.

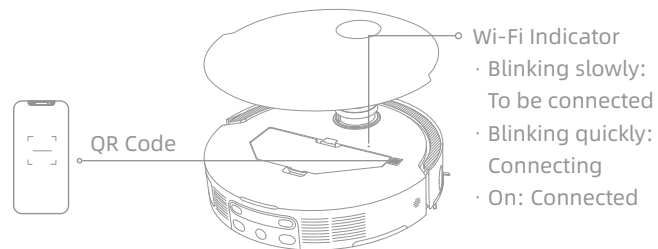


Installation Instructions

Installation Dimension


This product supports two installation methods: embedded in cabinet or not embedded in cabinet.

Option ① Not Embedded in Cabinet

Remove any objects that are closer than 60 cm from the front of the base station.

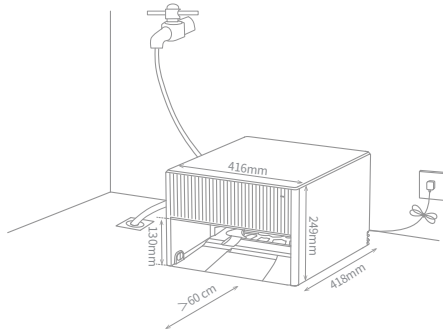

Option ② Embedded in Cabinet (with dust tank cover not visible)




How to install pipes and wires	height (mm)	width (mm)	depth* (mm)	height (above the ground) (mm)
On the back side of the base station	≥254	≥421	≥488	130
On either side of the base station	≥254	≥421	≥443	130

*Depth data includes the cabinet door's thickness (approximately 20 mm).


Installation Instructions

Option ③ Embedded in the Cabinet (with dust tank cover visible)

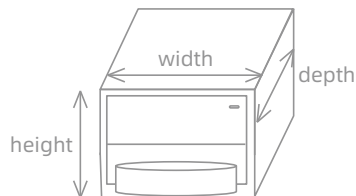


How to install pipes and wires	height (mm)	width (mm)	depth (mm)
On the back side of the base station	≥254	≥421	≥468
On either side of the base station	≥254	≥421	≥423

Recommended Hole-cutting Size



Cabinet not installed yet



Cabinet installed already

If the cabinet is not installed yet:

Cut a square hole with a side length of 30 mm. This hole should be reserved at the lower left/right corner of the cabinet side, and the position is close to the ground.

If the cabinet has been installed already:

Cut a circular hole with a diameter of 30 mm. The distance between the hole center and the ground shall not be higher than 800 mm. The specific hole-cutting position shall be determined according to the actual installation environment.


Installation Instructions

Installation Precautions

- If the size of the 3-way diverter valve does not match, please purchase a suitable adapter separately.
- Use a water pressure gauge to measure the water pressure and confirm that it is between 0.14 MPa and 0.8 MPa.
- Close the main water valve in your home before installation and make sure all the water in the pipes has been drained.
- Do not connect the base station to a hot water source.
- Before installation, please unplug the base station and make sure the base station is not connected to the power supply.


Installation Precautions

- Installation location needs to avoid direct sunlight and water.
- The location is recommended to be close to the water source and floor drain.
- It is recommended that the distance between the base station and the socket be within 1.5 m.
- Remove any objects that are closer than 60 cm from the front of the base station.
- Place the base station in a location with a good 2.4 GHz Wi-Fi signal.

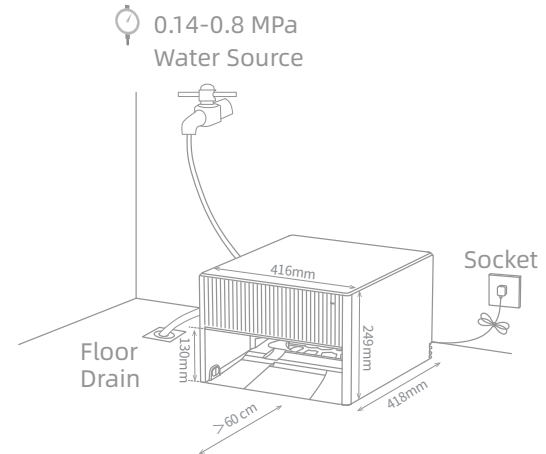

Installation Instructions

Completed Installation

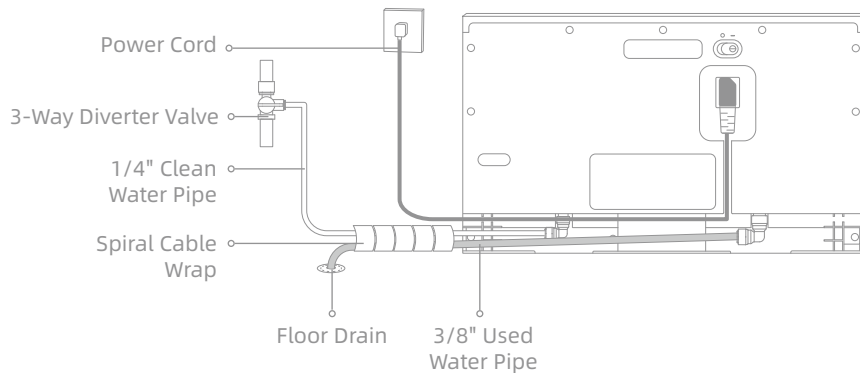


Note:

- The illustrations in this manual are for reference only. Please refer to the actual installation situation.
- It is recommended that the installation height of the used water pipe should not be higher than 80 cm.

How to install Connection Locking Clip

Adjust the direction of the handle on the connection locking clip to be consistent with the illustration, and then press the clip downward along the gap as shown in the illustration.

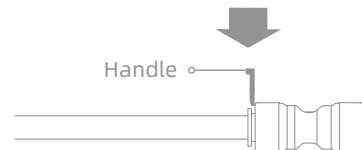


Note: Before installing, make sure that all connecting accessories are firmly installed.

Installation Instructions


Necessary Tools (not supplied)




Teflon Tape




Angle Valve



Knife




Tape Measure




Monkey Wrench

Installation Instructions

① Connect the Used Water Pipe

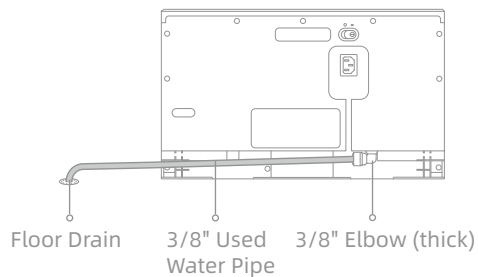

② Connect the Clean Water Pipe

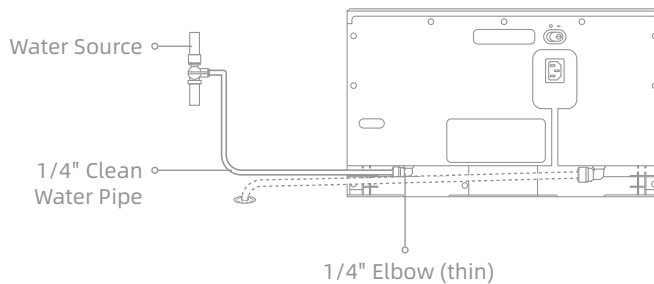

Note:

- Before installing, please firmly press the snap ring on the elbow to remove the pre-installed anti-leakage cap.
- It is recommended that the installation height of the used water pipe should not be higher than 80 cm.

Installation Instructions


③ Install the 3-way Diverter Valve

Note:


- Close the main water valve in your home before installation and make sure all the water in the pipes has been drained.
- Check whether the sealing ring is in place before installation. If not, all the butted male thread fittings need to be firmly wrapped with Teflon tape 6-9 turns in the direction of screwing to prevent leakage.
- It is recommended to install an angle valve at the water source before installing the 3-way diverter valve.
- Use a monkey wrench to install if necessary.

Completed Installation


Option 1
-With Male Thread Fitting



Option 2
-With Female Thread Fitting




Option 1- Water Source with Male Thread Fitting

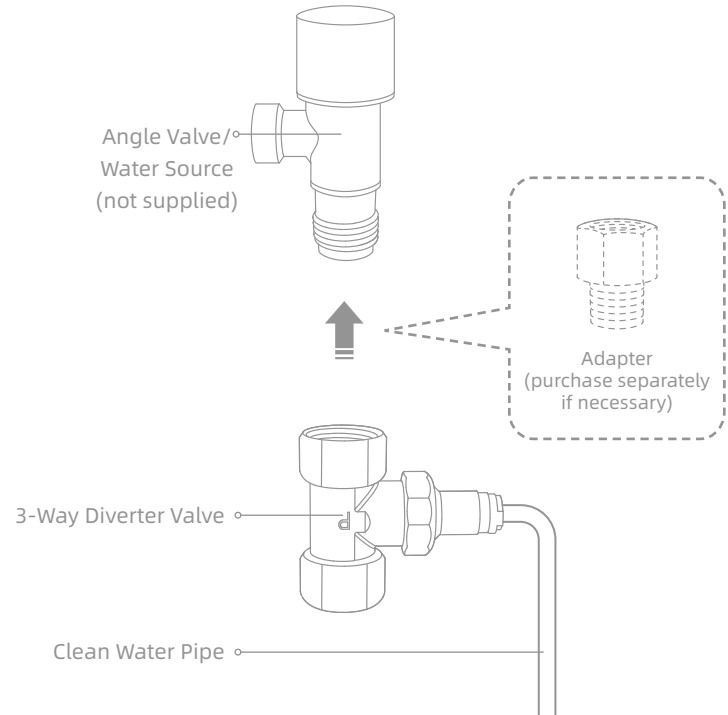

Installation Instructions


Option 2 - Water Source with Female Thread Fitting

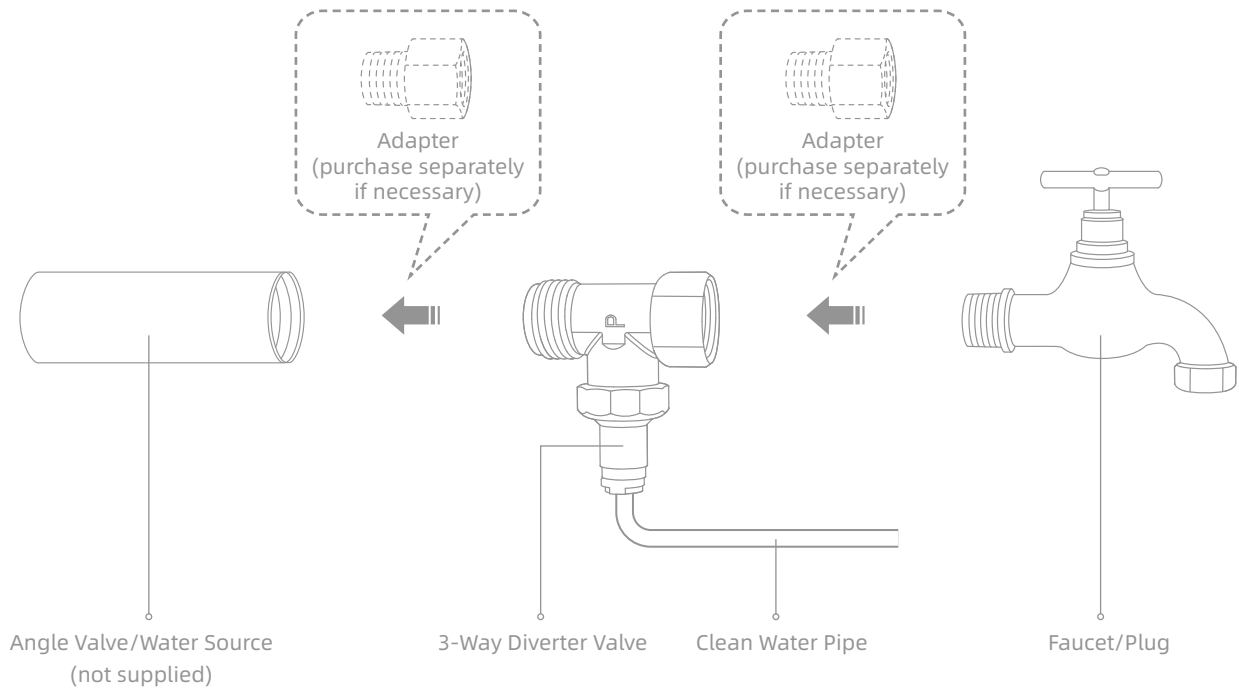


Installation Instructions

④ Tidy Up the Water Pipes and Wires


1. Clamp the water pipes and wires with wire organizer .

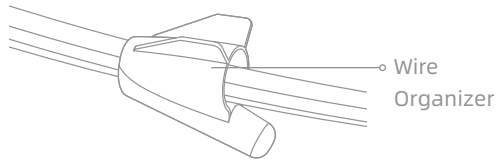

2. Thread the bottom of the wire organizer into the spiral cable wrap.

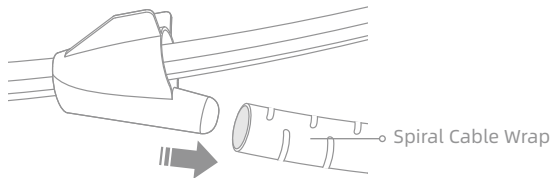

3. Pull the wire organizer backward to wrap the water pipes and wires.

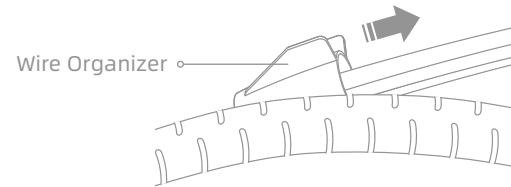


Test the Installation Effect

Test Method

1. Before testing, please power up the base station and then open the main water valve and angle valve at home.
2. Refer to the user manual to download and set up the app. After installing, a pop-up prompt will appear in the app, please complete the test steps according to the instructions.
3. Replug the base station and test again whether the base station can perform auto water refilling and draining properly.

Note: Please follow the instructions based on the latest app version.

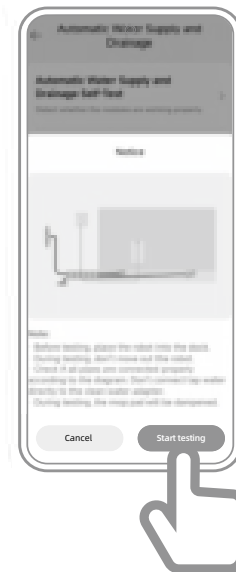

INSTALLATION COMPLETED

How to Use

Turn On/Off

Press and hold the power button for 3 seconds to turn on the robot. Place the robot onto the base station by aligning the charging contacts of the robot with those of the base station, and then the robot will turn on automatically and begin charging. To turn off the robot, move the robot away from the base station and press and hold the power button for 3 seconds.

Fast Mapping

After configuring the network for the first time, follow the instructions in the app to quickly create a map. The robot will start mapping without cleaning. When the robot returns to the base station, the mapping process has been completed and the map will be saved automatically.

Pause/Sleep

When the robot is running, press any button to pause it. If the robot is paused for more than 10 minutes, it automatically enters sleep mode. All indicators on the robot will turn off. Press any button on the robot, or use the app to wake up the robot.

Note: If the robot is paused and placed onto the base station, the current cleaning process will end.

Auto Resume Cleaning

If the battery is too low, the robot will automatically return to the base station to charge. After charging to the appropriate battery level, it will resume unfinished cleaning tasks.

Note: To use this function, please enable it in the app.

Do Not Disturb (DND) Mode

When the robot is set to the Do Not Disturb (DND) mode, the robot will be prevented from resuming cleaning. The DND mode is disabled by default at the factory. You can use the app to enable the DND mode or modify the DND period. The DND period is 22:00-8:00 by default.

Note:

- The scheduled cleaning tasks will be performed as usual during the DND period.
- The robot will resume cleanup where it left off after the DND period expires.

Robot Restarting

If the robot stops responding or cannot be turned off, press and hold the power button for 10 seconds to forcefully turn it off. Then, press and hold the power button for 3 seconds to turn the robot on.

How to Use


Vacuum and Mop

Note:

- When using the mop assembly for the first time, the robot performs the "Vacuum and Mop" task by default.
- During use, the base station will supply clean water and drain used water automatically.

1. Start cleaning

Press the power button on the robot, or use the app to make the robot start from the base station. Then the robot will plan the optimal cleaning route and perform the cleaning task based on the created map.




Note:

- The mop pads will be cleaned before the robot starts mopping, please wait patiently.
- To ensure the robot easily returns to the base station after cleaning, it is recommended to make the robot start from the base station. Do not move the base station, the washboard or the washboard filter during operation.
- Hot water cleaning can be enabled in the app for mop pad washing tasks, which applies to all modes. To prevent scalding, do not touch the water outlet when the function is on.

2. Auto mop washing

When cleaning, the robot will automatically return to the base station to wash mop pads based on the mop pad cleaning frequency specified in the app. The base station will automatically refill the robot's water tank and the robot will resume cleanup.

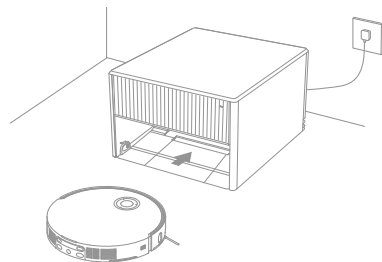

3. Automatically empty the dust box and wash and dry the mop pads

After the robot finishes a cleaning task and returns to the base station to charge, the base station will automatically empty the dust box and then wash and dry the mop pads.

Note:

- If the auto-empty function is turned off in the app, the base station will not automatically empty the dust box.
- The base station will empty the dust box according to the setting in the app.

Routine Maintenance

Parts

To keep the robot in good condition, it is recommended to refer to the accessory usage in the app or the following table for routine maintenance.

Part	Maintenance Frequency	Replacement Period
Main brushes	Once every 2 weeks	Every 6 to 12 months
Dust box's filter		Every 3 to 6 months
Side brush		
Mop pad holders		/
Washboard filter	Once every 1 to 2 months	/
Base station's signaling area	Once every month	
Charging contacts		
Auto-empty vents		
Caster wheel		
Omnidirectional wheel		
Edge sensor		
VersaLift sensor		


Part	Maintenance Frequency	Replacement Period	
3D dual-line laser sensors	Once every month	/	
Bumper window			
Carpet sensor			
Cliff sensors			
Bumper			
Robot's automatic water refilling inlet			
Bottom of the robot			
Dust box	Clean it as needed	/	
Main wheels			
Clearance legs			
Dust bag	/		Every 2 to 4 months
Mop pads			Every 1 to 3 months

Note: The frequency of maintenance and replacement depends on actual usage. If an exception occurs due to special circumstances, prompt maintenance or replacement is recommended.


Routine Maintenance

Washboard Filter


1. After the mop pad cleaning is complete, take out the robot and press the washboard base clips to remove the washboard filter.

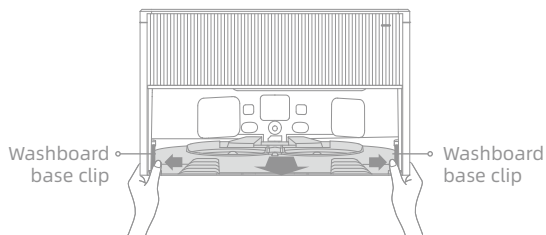

2. Remove and rinse the washboard filter with clean water, and wipe it clean.

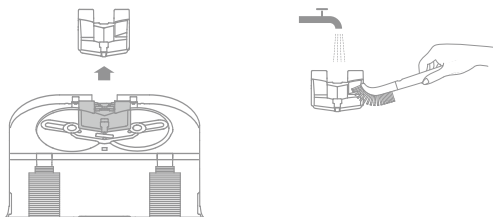


3. Reinstall the washboard filter first, and then the washboard base.

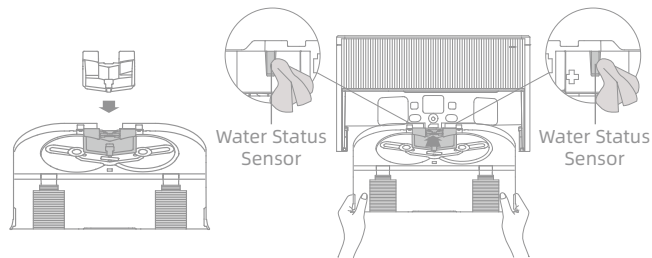

Note:

- If there are water stains remaining on the water status sensors, be sure to wipe them with a soft and dry cloth before reinstalling the washboard base.
- When reinstalling the washboard base, make sure that the clips at both ends are firmly in place after you hear a click.


4. Use the app or press the button  to return the robot to the base station, or manually put the robot back.

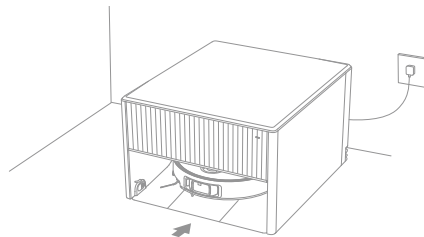


Routine Maintenance

Dust Bag


1. Remove the dust tank cover.




3. Remove the dust and debris from the filter with a dry cloth.



2. Discard the dust bag.

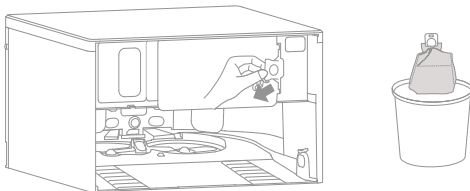

4. Install a new dust bag, then reinstall the dust tank cover.

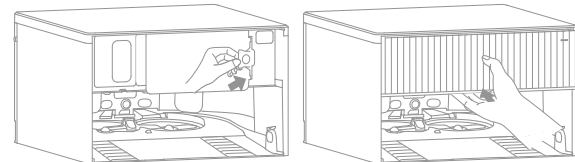


Note: Pulling upwards on the handle will seal the bag to prevent the dust and debris from accidentally falling out.


Routine Maintenance

Main Brushes

1. Press the brush guard clips inwards to remove the brush guard, and then lift the brushes out of the robot.

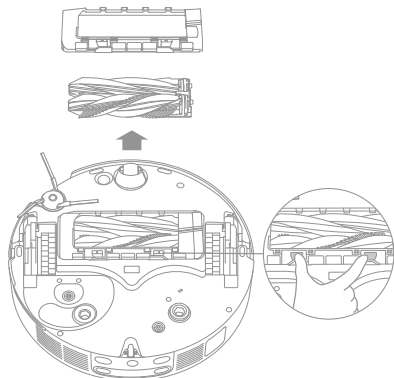


2. Pull out the brushes as shown in the figure. Use the provided cleaning tool to remove any hair tangled in the brushes. After cleaning, push the brushes firmly into the main brush holder until they click into place.

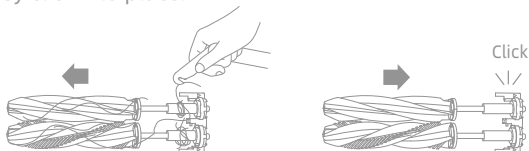


Note: Be careful while pulling out the main brushes to prevent injury.

3. With the screen-printed arrows facing upwards, insert the main brush holder into the slots downwards in an inclined way.

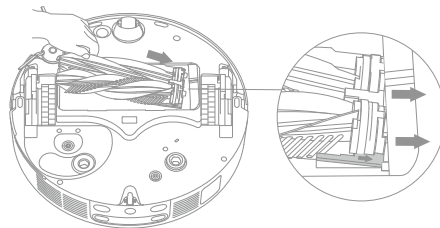


4. Align the front end of the brush guard with the slot, insert it downwards in an inclined way, and then press it into place.



Routine Maintenance


Side Brush

Unscrew the side brush with a screwdriver, clean the hair from the brush, and then screw it back on.

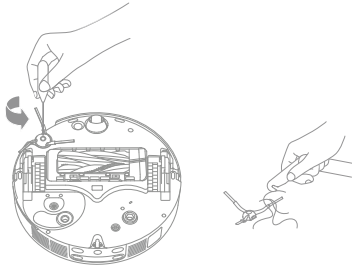


Mop Pad Holders

Remove and clean the mop pad holders.

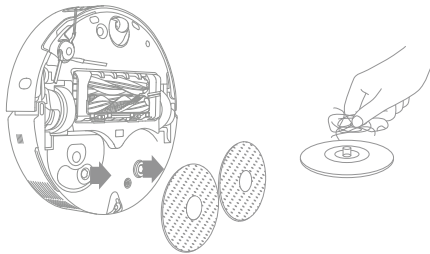

Omnidirectional Wheel

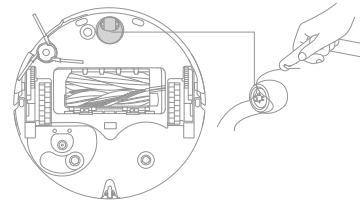


Note:

- Use a tool such as a small screwdriver to separate the axle and tire of the omnidirectional wheel. Do not use excessive force.
- Rinse the omnidirectional wheel under the running water and put it back after drying it completely.


Routine Maintenance

Dust Box and Filter


1. Remove the robot cover and press the dust box clip to remove the dust box.

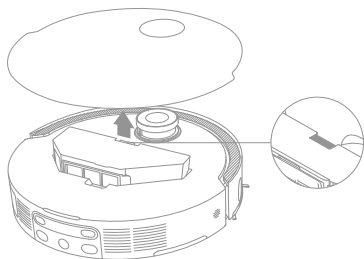

2. Remove the dust box filter, and then empty the dust box.

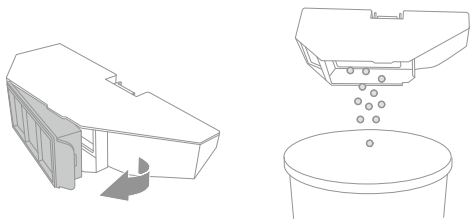


3. Gently tap the basket of the filter to remove the dirt.



Note: Do not attempt to clean the filter with a brush, a finger or sharp objects to prevent damage.

4. Rinse the dust box and filter with water and dry them completely before reinstalling.

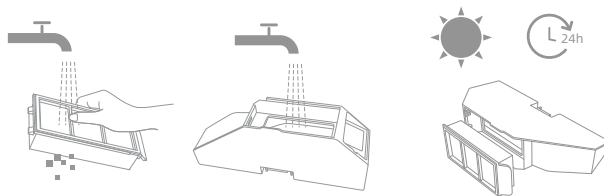


Note:

- Rinse the dust box and filter with clean water only. Do not use any detergent.
- Use the dust box and filter only when they are completely dry.

Routine Maintenance

Robot Sensors


Wipe the robot sensors by using a soft and dry cloth, as shown in the below figure:

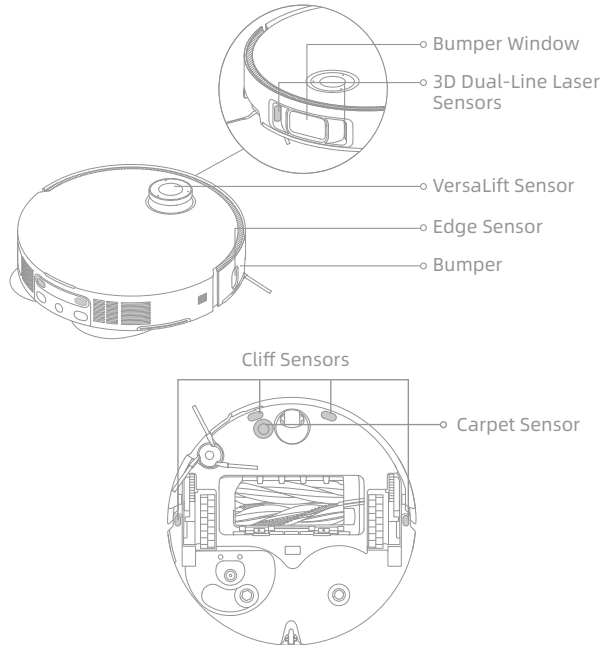

Note: A wet cloth can damage sensitive elements within the robot and the base station. Please use a dry cloth for cleaning.


Charging Contacts and Signaling Area

Clean the charging contacts and the signaling area with a soft and dry cloth.

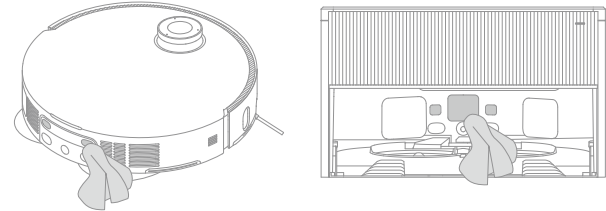

Auto-empty Vents


Clean the auto-empty vents of the robot and the base station with a soft and dry cloth.

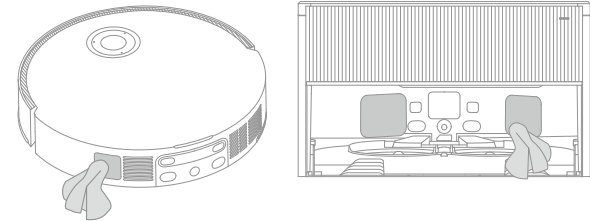

Routine Maintenance

Mop Pads

Remove the mop pads from the mop pad holders to replace them.

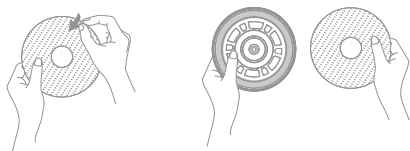

Battery


The robot contains a high-performance lithium-ion battery pack. Make sure that the battery remains well-charged for daily use to maintain optimal battery performance. If the robot is not used for an extended period of time, turn it off and put it away. To prevent damage from over-discharging, charge the robot at least once every three months.

Disassembly Instructions


! ONLY REQUIRED IN CASE OF RETURN

1. Enable the water-emptying function through the app to drain the remaining water inside both the robot and the base station.


Note: Please take out the washboard base and check whether there is remaining water. If so, be sure to wipe it dry and put the washboard base back again.




2. Remove the dust tank cover and pull out the auto-detergent compartment. Open the upper lid of the compartment and pour out the remaining cleaning solution, then reinstall the compartment.

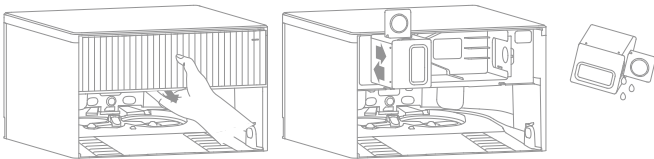

3. Before disassembly, unplug the base station, close the main water valve in your home.

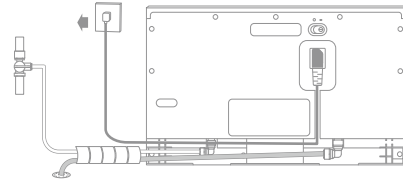

4. Firstly, pull out the connection locking clip. Then, press the snap ring at the joint forcefully to disassemble the pipe. Use a container to catch the water flowing out.

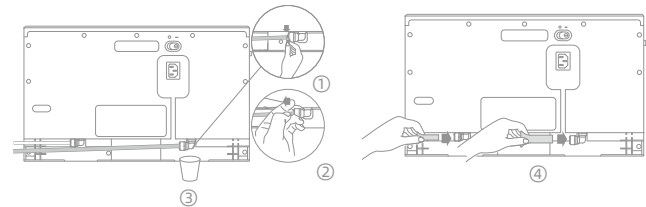


Note:

- Do not directly pull out the water pipe forcefully to avoid damage.
- Before packaging and transporting, be sure to take out the spare caps from the dust tank cover first, and then plug the elbows on the back of the base station to prevent leakage.

Troubleshooting

Problem	Solution
The robot will not turn on.	The battery is low. Recharge the robot on the base and try again. The temperature of the battery is too low or too high. It is recommended to operate the appliance at a temperature between 32 °F (0° C) and 104 °F (40° C).
The robot will not charge.	The base station is not connected to power, please make sure both ends of its power cord are correctly plugged in. The contact between the charging contacts on the base station and the robot is poor, please clean the charging contacts. Check whether there is any foreign object at the connector of the robot and remove the foreign object if any.
The robot fails to connect to Wi-Fi.	The Wi-Fi network password is incorrect. Make sure the password used to connect to your Wi-Fi network is correct. The robot does not support a 5 GHz Wi-Fi connection. Make sure the robot is connected to a 2.4 GHz Wi-Fi connection. The Wi-Fi signal is weak. Make sure the robot is in an area with good Wi-Fi coverage. The robot may not be ready to be configured. Please exit and re-enter the app, and then try again as instructed.
The robot cannot find and return to the base station.	The base station is disconnected from power or moved when the robot is not on it. Please connect the base station to the power supply or place the robot onto the base station to charge. There are too many obstructions around the base station. Place the base station in a more open area. Moving the robot may cause it to re-position itself, and it will recreate a map if re-positioning fails. If the robot is too far from the base station, it might not be able to automatically return on its own, in which case you will need to manually place the robot onto the base station. Wipe the signaling area on the base station to remove dust or debris.
The robot gets stuck in front of the base station and cannot return to it.	Clear any obstruction within 60 cm in front of the base station to prevent the robot from being blocked. The route for returning to charge is blocked, e.g. the door is closed. The robot may slip if the floor in front of the base station is overly wet. If so, clean the excess water before trying again. It is recommended to move the base station to a different place and try again.
The robot will not turn off.	The robot cannot be turned off when it is charging. It is recommended to move the robot from the base station, and then press and hold the power button for 3 seconds to turn it off. If the robot cannot be turned off by performing step 1, press and hold the power button for 10 seconds to forcibly turn off the robot. If the problem persists, please contact after-sales service.
The mop pad holder is raised abnormally.	Please remove the mop pad holder to check if there is any foreign object stuck in it, and try to restart the robot. If the problem persists, please contact the after-sales service team.

Troubleshooting

Problem	Solution
The charging speed is slow.	It takes about 4.5 hours to fully charge the robot when its battery is low. If you operate the robot at temperatures outside of the specified range, the charging speed will automatically slow down to extend the battery life. The charging contacts on both the robot and the base may be dirty, please wipe them with a dry cloth.
The noise increases while the robot is operating.	Check whether the dust box filter is clogged. If so, clean it or replace it. A hard object may be caught in the main brush or the dust box. Check and remove any hard object. The main brush or the side brush may become tangled. Check and remove any foreign objects. Switch the suction mode to Standard or Quiet.
The robot moves without following the set route.	Objects such as power cords and slippers should be organized before using the robot. Working on wet slippery surfaces causes the main wheel to slip. It is recommended to dry the wet places before using the robot. Wipe the bumper window and 3D dual-line laser sensors on the robot with a clean, soft cloth to keep them clean and unobstructed.
The robot misses the rooms to be cleaned.	Make sure that the doors of the rooms to be cleaned are open. The place in front of the room to be cleaned may be wet and slippery, causing the robot to slip and work abnormally. Please try drying the floor before using the robot.
The robot will not resume cleaning after charging.	Make sure that the robot is not set to the Do Not Disturb (DND) mode, which will prevent it from resuming cleaning. The robot will not resume cleaning after you manually place the robot on the base station or send the robot to charge via the app or the button  .
The water level in the washboard is abnormal.	Take out the washboard base, check whether there is any blockage around the washboard filter and clean it. Check whether the sewage drain outlet is blocked and clean it. Check the cleaning solution. Do not add any liquid other than the officially-approved cleaning solution.
The base station cannot automatically empty the dust box.	Check whether the dust bag in the dust tank is full. If the dust bag is not full, check whether there is any obstruction at the auto-empty vents of the robot, the base station, or the dust box. If any, clean the blocked part in time.

For more support, contact us via <https://global.dreametech.com>

Specifications

Robot

Model	RLX86CE
Charging Time	Approx. 4.5 hours
Rated Voltage	14.4 V \approx
Rated Power	75 W
Operation Frequency	2400-2483.5 MHz
Maximum Output Power	<20 dBm

Under normal use of condition, this equipment should be kept a separation distance of at least 20 cm between the antenna and the body of the user.

Base Station/Charging Dock

Power consumption in off mode: ≤ 0.3 W

Power consumption in standby mode: ≤ 0.5 W (within 15 minutes after the robot leaves the base station/charging dock)

Robot&Base Station/Charging Dock

The equipment does not have a standby mode or other equivalent states in terms of standby requirements, power management function, or the ability to deactivate wireless network connections due to battery maintenance needs. The power consumption of the equipment is likely to be higher than other equipment models meeting these functional requirements.

Base Station

Model	RBXE0307
Rated Input	220-240 V \sim 50-60 Hz
Rated Output	20 V \approx 2 A
Rated Power (during dust emptying)	700 W
Rated Power (during hot water cleaning)	1160 W
Rated Power (during charging and drying)	87 W
Water Pressure Range	0.14-0.8 MPa

Note:

- Rated Power (during hot water cleaning) is determined by the power value during the representative period (water temperature 25°C).
- Rated Power (during charging and drying) is determined by the power value during full load period.

Battery Disposal and Removal

The built-in lithium-ion battery contains substances that are hazardous to the environment. Before disposing of the battery, make sure the battery is removed by qualified technicians and discarded at an appropriate recycling facility.

- the battery must be removed from the appliance before it is scrapped;
- the appliance must be disconnected from the supply mains when removing the battery;
- the battery is to be disposed of safely.

CAUTION:

Before removing the battery, disconnect the power and run out the battery as much as possible.

Unneeded batteries should be discarded at an appropriate recycling facility.

Do not expose to high temperature environment to avoid risks of explosion.

Under abusive conditions, liquid may be ejected from the battery. If contact occurs, flush with water and seek medical help.

Removal Guide:

1. Turn over the robot, use a proper tool to remove the screws on the back of the robot, and then remove the cover.
2. Unplug the terminals between the battery and PCB board to remove the battery.

WEEE Information



All products bearing this symbol are waste electrical and electronic equipment (WEEE as in directive 2012/19/EU) which should not be mixed with unsorted household waste. Instead, you should protect human health and the environment by handing over your waste equipment to a designated collection point for the recycling of waste electrical and electronic equipment, appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. Please contact the installer or local authorities for more information about the location as well as terms and conditions of such collection points.

Güvenlik Bilgisi

Cihazın uygunsuz kullanımının yol açtığı elektrik çarpması, yangın veya yaralanmadan kaçınmak için cihazı kullanmadan önce kullanım kılavuzunu dikkatlice okuyun ve ileride başvurmak üzere saklayın.

Kullanım Sınırlamaları

- Bu ürün, güvenli kullanımı sağlamak ve risklerden kaçınmak üzere, 8 yaşından küçük çocuklar ve fiziksel, duyuşsal, zihinsel engelli kişiler veya sınırlı deneyime veya bilgiye sahip kişiler tarafından bir ebeveyn veya vasiinin gözetimi olmadan kullanılmamalıdır. Temizlik ve bakım, gözetim olmaksızın çocuklar tarafından yapılmamalıdır.
- Cihaz, yalnızca cihazla birlikte verilen güç kaynağı ünitesi ile kullanılmalıdır.
- Bu cihaz, yalnızca yetkin kişiler tarafından değiştirilebilecek piller içerir.
- Bu ürünün etrafındaki alanın veya bu ürünün içinde bulunduğu dolabın iyi havalandırılmasını sağlayın.
- Bu ürünü kurduktan sonra, elektrik prizinin kolayca ulaşılabilir bir yerde olduğundan emin olun.
- Temizlenecek alanı toplayın. Çocuklar cihazla oynamamalıdır. Robot çalışırken çocukların ve evcil hayvanların robotla aralarında güvenli bir mesafe olduğundan emin olun.
- Cihazı banyoya veya havuz etrafına kurmayın, buralarda şarj etmeyin veya kullanmayın.
- Bu ürün yalnızca ev ortamındaki zemin temizliği içindir. Dış mekânlarda, zemin harici yüzeylerde veya ticari ya da endüstriyel ortamlarda kullanmayın.
- Cihazın düzgün bir ortamda doğru bir şekilde çalıştığından emin olun. Aksi halde, cihazı kullanmayın.

Güvenlik Bilgisi

Kullanım Sınırlamaları

- Güç kablosu hasar gördüğü takdirde, üreticiden veya yetkili servisten temin edilebilecek özel bir kablo veya teçhizatla değiştirilmelidir.
- Robotu, koruyucu bariyeri olmayan zemin üzeri asma alanlarda kullanmayın.
- Robotu baş aşağı çevirip koymayın. LMS kapağını, robot kapağını veya tamponu robot tutup taşımak için kullanmayın.
- Robotu, ortam sıcaklığının 0°C'nin üzerinde ve 40°C'nin altında olduğu ortamlarda kullanın. Zeminde sıvı veya yapışkan madde olmadığından emin olun.
- Bir nesneye takılıp sürüklenmenin verebileceği zarardan kaçınmak için cihazı çalıştırmadan önce bir yere sabit olmayan nesnelere yerden kaldırın ve temizlik güzergahı üzerindeki kabloları veya elektrik kablolarını toplayın.
- Robotun çarparak zarar vermesini önlemek için kırılabilir ve küçük nesnelere yerden kaldırın.
- Saç, parmak ve diğer vücut bölgelerini robotun emici ağzından uzak tutun.
- Temizlik gerecini çocukların erişemeyeceği bir yerde saklayın.
- Cihazı bir bebeğin ya da çocuğun uyuduğu bir ortamda çalıştırmayın.
- Gerek durduğu, gerek hareket ettiği sırada çocukları, evcil hayvanları ve diğer nesnelere robotun üzerine bindirmeyin/koymayın.
- Temiz su haznesine yalnızca su ve resmi olarak onaylanmış temizlik solüsyonu eklenebilir. Alkol veya dezenfektan gibi başka sıvılar eklemeyin. Temizlik solüsyonu ile temiz su oranına temizlik solüsyonu şişesi üzerinden bakılabilir. Temizlik solüsyonunu çocukların erişemeyeceği bir yerde saklayın.

Güvenlik Bilgisi

Kullanım Sınırlamaları

- Robotu yanan nesnelere temizlemek için kullanmayın. Robotu yanıcı veya kolay tutuşabilen sıvıları, aşındırıcı gazları veya seyreltilmemiş asit ya da çözücü maddeleri toplamak için kullanmayın.
- Sert veya keskin nesnelere süpürmeyin. Cihazı taş, büyük kâğıt parçaları veya cihazı tıkayabilecek diğer malzemeler gibi nesnelere toplamak için kullanmayın.
- Temizlik veya bakım işlemi yapılmadan önce cihazın fişi prizden çıkarılmalıdır.
- Robotu veya ana istasyonu ıslak bir bezle silmeyin veya herhangi bir sıvı ile durulamayın. Yıkabilir parçaları temizledikten sonra, yerlerine takmadan ve kullanmadan önce iyice kurutun.
- Bu ürün, pakette bulunan yeni boru düzeneği kullanılarak su kaynağına bağlanmalıdır. Eski boru düzeneğini tekrar kullanmayın.
- Su bağlantı aksesuarlarını takmadan veya sökmeden önce ana istasyonun güç kaynağına bağlı olmadığından emin olun.
- Açılmış paketi düzgün bir şekilde saklayın ve çocukların parçalarla oynamasına veya onları yutmasına izin vermeyin.
- Lütfen bu ürünü sökmeyin, onarmayın veya değiştirmeyin. Herhangi bir sorun meydana gelirse lütfen satış sonrası servis ekibiyle iletişime geçin.
- Bu ürünün bir yerden başka bir yere aktarılması gerektiğinde lütfen öncelikle kalan suyu boşaltın. Orijinal paketin kullanılması önerilir.

Güvenlik Bilgisi

Kullanım

Sınırlamaları

Piller ve Şarj

- Lütfen bu ürünü Kullanıcı Kılavuzundaki talimatlara uygun bir şekilde kullanın. Bu ürünün uygunsuz kullanımından kaynaklanan kayıp veya zararlardan kullanıcılar sorumludur.
- Üçüncü taraflara ait herhangi bir pil veya ana istasyon kullanmayın. Robot sadece RBXE0307 model ana istasyon ile kullanılabilir.
- Pili veya ana istasyonu kendi başınıza sökmeye, onarmaya veya bunlar üzerinde değişiklik yapmaya çalışmayın.
- Ana istasyonu bir ısı kaynağının yakınına koymayın.
- Ana istasyonun şarj kontaklarını silmek veya temizlemek için ıslak bez veya ıslak ellerinizi kullanmayın.
- Kullanılmış pilleri uygun olmayan bir şekilde imha etmeyin. İhtiyaç fazlası piller uygun bir geri dönüşüm tesisinde imha edilmelidir.
- Güç kablosu zarar görür veya koparsa kabloyu kullanmayı derhal bırakın ve satış sonrası servisle iletişime geçin.
- Robot nakledilirken kapalı olduğundan ve mümkünse orijinal paketinde tutulduğundan emin olun.
- Robot uzun süre kullanılmayacaksa tamamen şarj edin, ardından kapatın ve serin, kuru bir yerde saklayın. Pilin aşırı derecede boşalmasını önlemek için robotu en az her 3 ayda bir tekrar şarj edin.

Güvenlik Bilgisi

Lazer Güvenlik Bilgileri

· Bu üründeki lazer sensörü, Sınıf 1 lazer ürünleri için IEC 60825-1:2014/ EN 60825-1:2014/A11:2021 Standardına uyar. Kullanım sırasında lütfen doğrudan gözle temasından kaçının.

SINIF 1 LAZER ÜRÜNÜ
TÜKETİCİ LAZER ÜRÜNÜ
EN 50689:2021



Yalnızca iç mekânlarda kullanım içindir




Kullanıcı kılavuzunu okuyun

Bu belgeyle, Dreame Trading (Tianjin) Co., Ltd. RLX86CE telsiz ekipman türününün 2014/53/AB sayılı Direktif ile uyumlu olduğunu beyan eder. AB uygunluk beyanının tam metnini şu internet adresinde bulabilirsiniz: <https://global.dreametech.com>
Ayrıntılı e-kılavuz için lütfen tıklayınız: <https://global.dreametech.com/pages/user-manuals-and-faq>


Ürün Genel Bilgileri

Paket İçerikleri




Robot

Diğer Aksesuarlar



Güç Kablosu




Su Siperi Filtresi
(yerleşik)




Toz Torbası, 2 adet
(yerleşik, 1 adet)



Otomatik Deterjan
Bölmesi (yerleşik)



Ana İstasyon



Paspas Padi, 2
adet (yerleşik)




Paspas Padi
Tutucusu, 2 adet



Temizlik Aracı



Temizlik Solüsyonu




Kullanıcı
Kılavuzu

Ürün Genel Bilgileri

Otomatik Yeniden Doldurma ve Tahliye Amaçlı Su Bağlantı Aksesuarları



1/4 inç (0,6 cm)
Temiz Su Borusu




3/8 inç (0,95 cm)
Kullanılmış Su
Borusu



Spiral Kablo Sargısı




Kablo Düzenleyici



3 Yollu Yönlendirme Valfi



1/4 inç (0,6 cm) Dirsek
(ince) x 2
(yerleşik x 1)



3/8 inç (0,95 cm)
Dirsek (kalın) x 2
(yerleşik x 1)



1/4 inç (0,6 cm)
Başlık x 2
(yerleşik)



3/8 inç (0,95 cm)
Başlık x 2
(yerleşik)




1/4 inç (0,6 cm)
Bağlantı Kilitleme
Klipsi (küçük) x 4



3/8 inç (0,95 cm)
Bağlantı Kilitleme
Klipsi (büyük) x 4

Ürün Genel Bilgileri

Robot

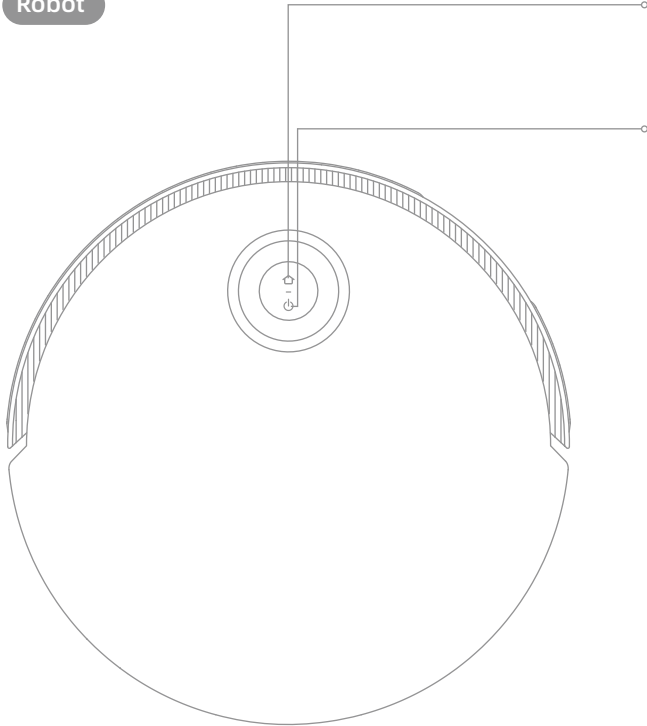

🏠 Yanışma Düğmesi

- Robotu ana istasyona geri göndermek için basın
- Çocuk Kilidini devre dışı bırakmak için düğmesini 3 saniye basılı tutun.

⏻ Güç / Temizleme Düğmesi

- Açmak veya kapatmak için düğmesini 3 saniye basılı tutun.
- Robot açıldıktan sonra temizliğe başlamak için basın

🔴 Dairesel Durum Göstergesi

- Sürekli Yanan Mavi: Temizlik tamamlandı
- Sürekli Yanan Yeşil: Şarj etme
- Yanıp Sönen Turuncu: Hata

🔴 PİL Durumu Göstergesi



- Sürekli Yanan Beyaz: Temizlik tamamlandı
- Yavaş Yanıp Sönen Beyaz: Şarj oluyor (düşük pil değil)
- Sabit Turuncu: Düşük pil seviyesinde bekleme veya düşük pil seviyesinde duraklama
- Yavaş Yanıp Sönen Turuncu: Şarj oluyor (düşük pil)
- Yanıp Sönen Turuncu: Hata
- Yanıp Sönen Pembe: Kamera etkin

Not:

- Robot temizlik yaparken veya şarj olmak üzere geri dönerken, üzerindeki herhangi bir düğmeye basarak robotu duraklatabilirsiniz.
- Çocuk Kilidi Dreamehome Uygulaması aracılığıyla etkinleştirilebilir/ devre dışı bırakılabilir.

Ürün Genel Bilgileri


Robot ve Sensörler

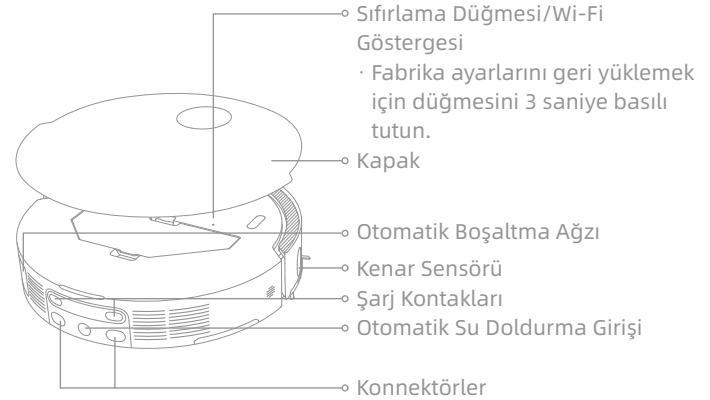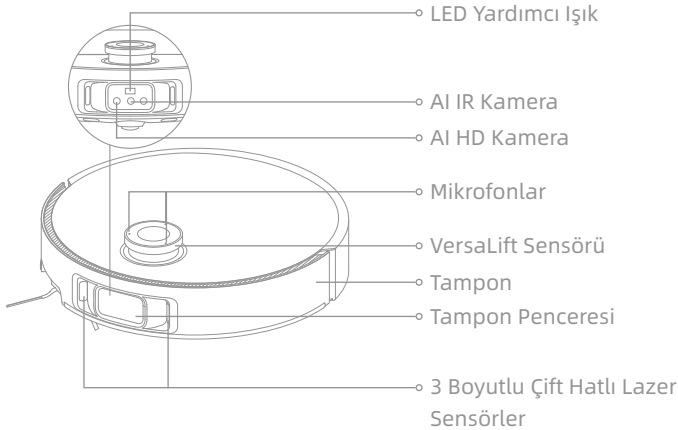


Not: Robot bekleme modundayken, ana istasyonda şarj olurken veya dar alanları temizlerken VersaLift sensörü alçaltılacaktır. Dar alanların temizlenmesi durumunda, robotun konumunu etkileyebileceği için robotu hareket ettirmeyin.

Ürün Genel Bilgileri


Robot ve Sensörler

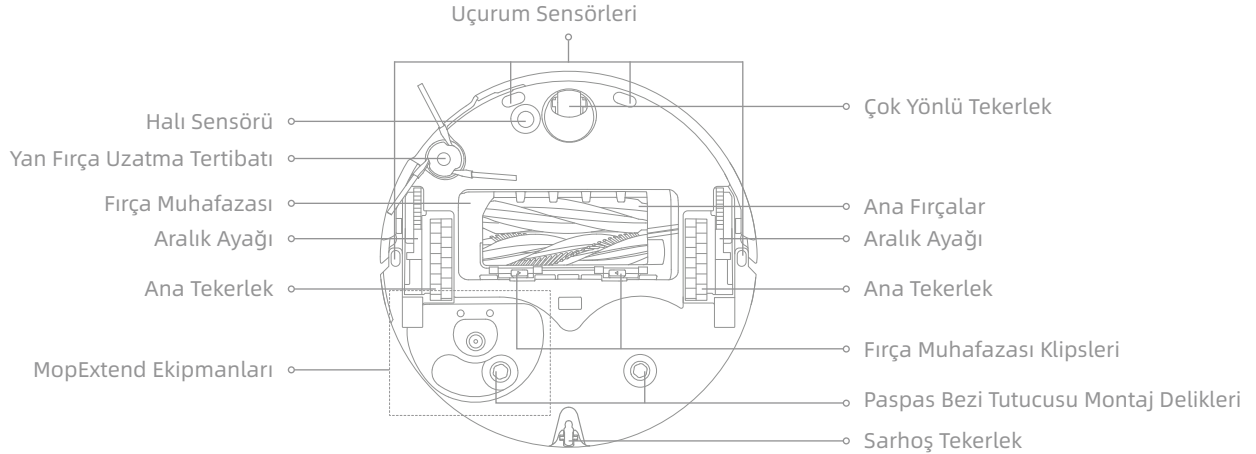

Toz Kutusu


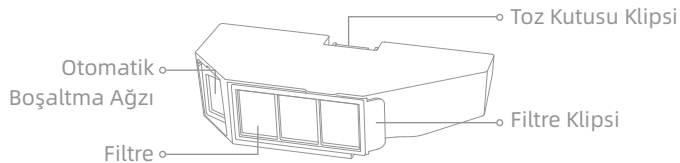


Paspas Tertibatı

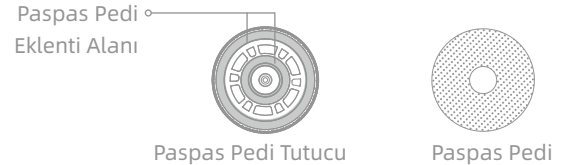

Ürün Genel Bilgileri


Ana İstasyon

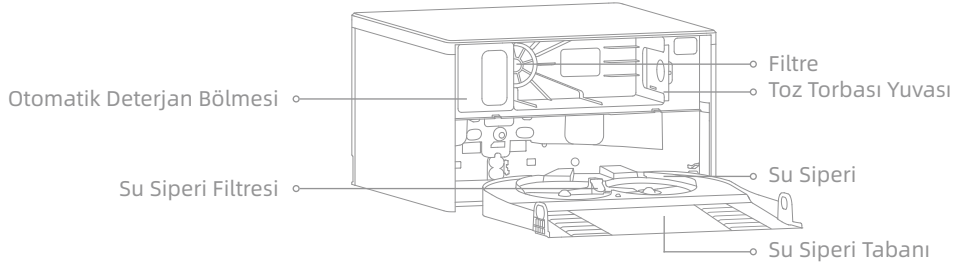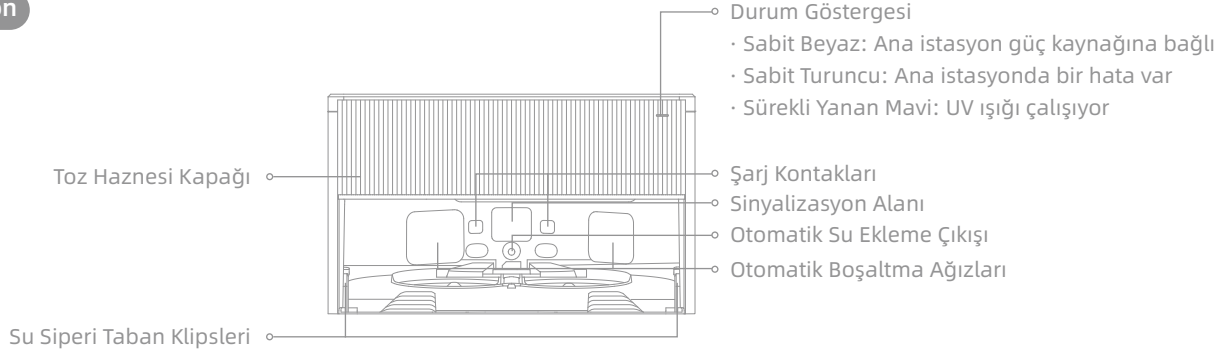

Not: Toz haznesi kapağının içine yedek olarak bir çift sızıntı önleme kapağı yerleştirilmiştir.

Ürün Genel Bilgileri

Ana İstasyon

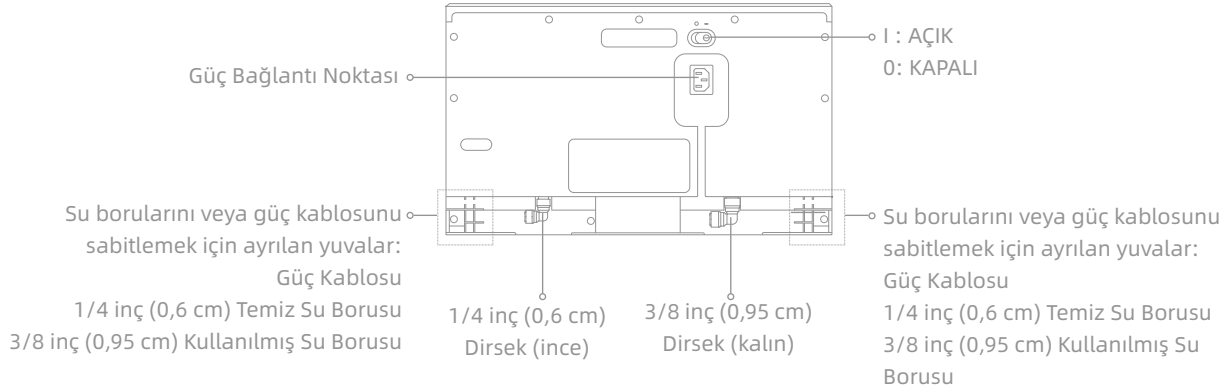


Not:

- Su borusunu takmadan önce, dirsekteki tutucu halkaya kuvvetle bastırıp sızıntı önleme başlığını çıkardığınızdan emin olun.
- Kullanılmış su borusunun kurulum yüksekliğinin 80 cm'den yüksek olmaması önerilir.

Kullanmadan Önce

1. Otomatik Yeniden Doldurma ve Tahliye Amaçlı Su Bağlantı Aksesuarlarını Takın


Uygun kurulum konumunu onayladıktan sonra, evinizdeki ana su vanasını veya açılı valfi kapatın ve yerinde otomatik doldurma ve tahliye amaçlı su bağlantı aksesuarlarını takın.

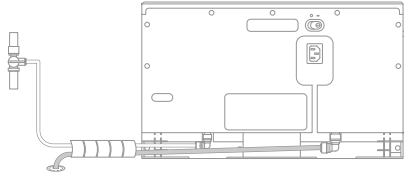

Not: Tamamlanmış kurulum yalnızca referans amaçlıdır. Lütfen gerçek kurulum durumunu esas alın.

2. Ana İstasyonu Yerleştirin ve bir Elektrik Prizine Bağlayın



Ana istasyona önden 60 cm'den yakın olan nesnelere kaldırın. Güç kablosunu sıkıca takarak göstergenin açıldığını kontrol edin.

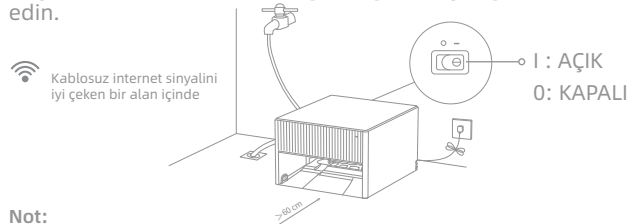

Not:

- Sinyal alanını engelleyebilecek bir nesne bulunmadığından emin olun.
- Su lekelerinin aşıp zeminleri veya halıları ıslatmasını engellemek için ana istasyonun seramik veya mermer zeminlere yerleştirilmesi önerilir.

3. Robot Korumalarını Çıkarın ve Paspas Tertibatını Takın

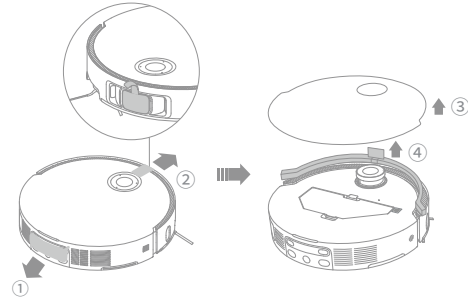


Kullanmadan Önce

4. Robotu Ana İstasyona Bağlayın

Robotu açmak için robot üzerindeki güç düğmesini 3 saniye süreyle basılı tutun. Robotu, paspas tertibatı su siperine doğru bakacak şekilde ana istasyona yerleştirin. Ardından, robot ana istasyona başarılı bir şekilde bağlandığında sesli bir bildirim duyacaksınız.

Robot tamamen şarj olduktan sonra, robot ve ana istasyon üzerindeki durum göstergeleri 10 saniye süreyle yanar ve ardından söner.



Not: Robotu ilk kez kullanmadan önce tamamen şarj etmeniz önerilir. Pil tükendiği için robot açılmadığı takdirde robotu şarj etmek üzere ana istasyona kendiniz bağlayın.

5. Kurulumun Etkisini Test Edin

Ana istasyonun otomatik su doldurma ve boşaltmayı düzgün bir şekilde yapıp yapamadığını test etmek için Dreamehome Uygulamasını kullanın.


Not: Uygulamayı kullanmadan önce robotun bağlı olduğundan emin olun. İlgili adımlar için lütfen “Dreamehome Uygulaması ile Bağlantı” bölümüne başvurun.

6. Temizlik Solüsyonunu Ekleyin

(1) Toz haznesi kapağını çıkarın ve otomatik deterjan bölmesini dışa doğru çekin.

(2) Bölmenin üst kapağını açın ve temizlik solüsyonunu ekleyin.


(3) Bölmenin kapağını kapatın, ana istasyona geri yerleştirin ve ardından toz haznesi kapağını yerine takın. Temizlik solüsyonu, çalışma sırasında otomatik olarak eklenecektir.

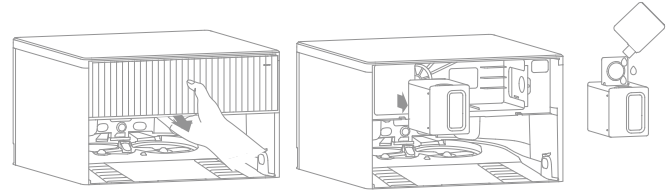


Not:

- Otomatik deterjan bölmesi, kullanılacak temizlik solüsyonu ile doldurulabilir. Arızaları önlemeye yardımcı olmak için resmi olarak onaylı temizlik solüsyonundan başka bir sıvı kullanmayın.
- Otomatik deterjan bölmesini klik sesini duyacak şekilde yerine oturtun.

Evinizin Hazırlanması

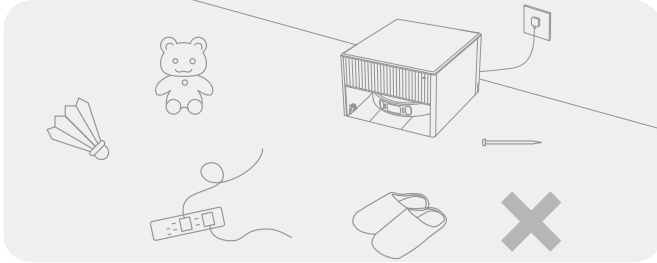


Temizliğe başlamadan önce lütfen sabit durmayan, kırılabilir, değerli veya tehlikeli eşyaları ortadan kaldırın, robotun takılarak, çizerek veya vurarak hasar vermemesi için yerdeki kabloları, giysileri, oyuncakları, sert nesnelere veya keskin nesnelere kaldırın/ düzenleyin.

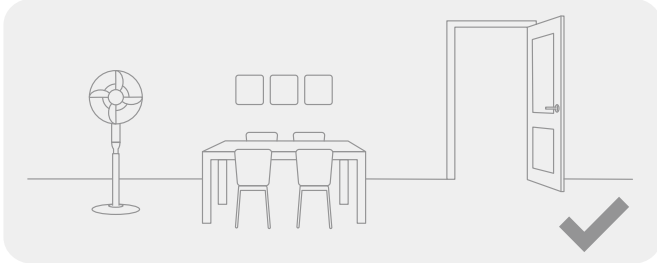


Temizlenecek odanın kapısını açın ve mobilyaları kendi yerlerine koyarak daha fazla alan açın.

Not:

- Robotu ilk kez çalıştırdığınızda engel çıkarabilecek şeyleri zamanında kaldırmak için temizlik yaparken robotu takip edin.
- LED yardımcı ışıkları, loş aydınlatılmış ortamlarda yardımcı ışık sağlayacaktır.
- Taş, çelik bilye ve oyuncak parçaları gibi sert nesnelere veya inşaat atığı, cam kırığı veya çivi gibi keskin nesnelere süpürmemeyi, aksi takdirde zemin çizilebilir.

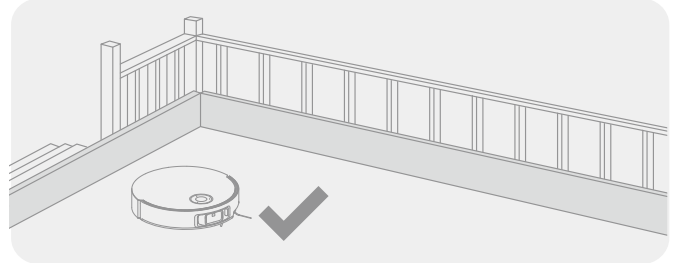

Temizliğe başlamadan önce, robotun güvenli ve sorunsuz bir şekilde çalışması için merdivenlerin kenarlarına fiziksel bir engel koyun.

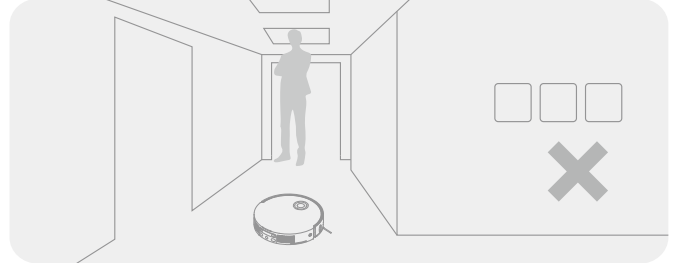


Robotun temizlenmesi gereken alanları kaçırmasının önüne geçmek için robotun önünde, bir eşikte, koridorda veya dar yerlerde durmayın.

Dreamehome Uygulaması ile Bağlantı

1. Dreamehome Uygulamasını İndirin

Uygulamayı indirmek ve yüklemek için robot kapağını çıkarın ve robot üzerindeki QR kodunu taratın veya uygulama mağazasında "Dreamehome"u arayın.

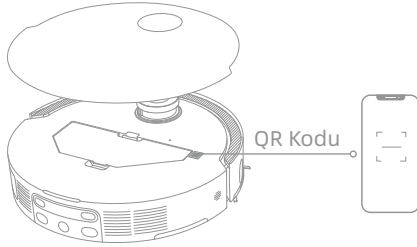

Not:


- Yalnızca 2.4 GHz kablosuz internet desteklenir.
- Uygulama yazılımındaki güncellemeler nedeniyle, gerçek işlemler klavuzdaki yönergelerden farklı olabilir. Lütfen güncel uygulama sürümüne dayalı olarak talimatları izleyin.

2. Cihazı ekleyin

Dreamehome uygulamasını açın, "Bağlanmak için QR kodunu tara"ya dokununuz ve cihazı eklemek için aynı QR kodunu robotta tekrar tarayın. Kablosuz internet bağlantısını tamamlamak için lütfen talimatları izleyin.

Not:

- Kablosuz interneti sıfırlamak için 2. adımı tekrarlayın ve ardından kablosuz internet bağlantısını tamamlamak için ekrandaki talimatları izleyin.
- Cihazı kablosuz internet ağından ayırmak için robot süpürgecinin üzerindeki Sıfırlama Düğmesini 3 saniye basılı tutun.

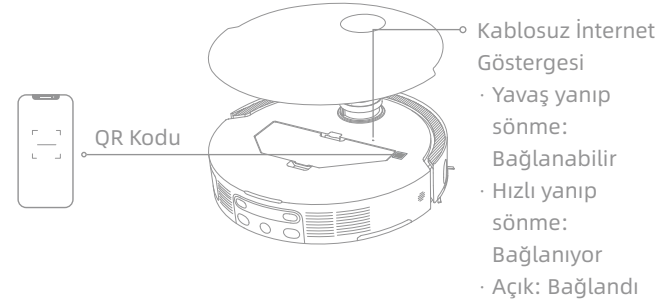


Kurulum Talimatları

Kurulum Boyutları


Bu ürün iki kurulum yöntemini destekler: kabine yerleşik veya kabine yerleşik olmayan biçimde.

Seçenek ① Kabine Yerleşik Değil

Ana istasyona önden 60 cm'den yakın olan nesnelere kaldırın.

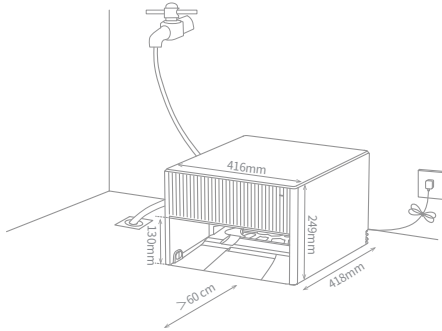

Seçenek ② Kabine Yerleşik (toz haznesi kapağı görünmez)

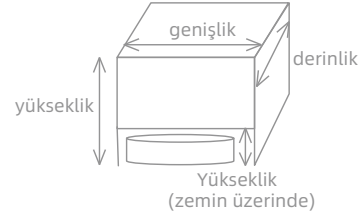


Boru ve kabloların takılması	yükseklik (mm)	genişlik (mm)	derinlik* (mm)	Yükseklik (zemin üzerinde) (mm)
Ana istasyonun arka kısmında	≥ 254	≥ 421	≥ 488	130
Ana istasyonun her iki tarafında	≥ 254	≥ 421	≥ 443	130

*Derinlik verileri kabin kapısının kalınlığını içerir (yaklaşık 20 mm).


Kurulum Talimatları

Seçenek ③ Kabin Yerleşik (toz haznesi kapağı görünür)

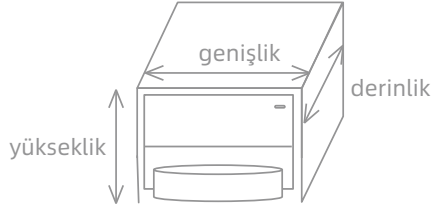


Boru ve kabloların takılması	yükseklik (mm)	genişlik (mm)	derinlik (mm)
Ana istasyonun arka kısmında	≥ 254	≥ 421	≥ 468
Ana istasyonun her iki tarafında	≥ 254	≥ 421	≥ 423

Önerilen Delik Boyutu



Kabin henüz kurulu değil



Kabin hâlihazırda kurulu

Kabin henüz kurulu değilse:

Kenar uzunluğu 30 mm olan kare bir delik kesin. Bu delik kabin tarafının alt sol veya sağ köşesinde açılmalı ve konumu zemine yakın olmalıdır.

Kabin hâlihazırda kurulu ise:

Çapı 30 mm olan dairesel bir delik kesin. Delik merkezi ile zemin arasındaki mesafe 800 mm'den yüksek olmamalı ve özel delik kesme konumu gerçek kurulum ortamına göre belirlenmelidir.


Kurulum Talimatları

Kurulum Uyarıları

- 3 yollu yönlendirme valfinin boyutu uymadığı takdirde lütfen ayrıca uygun bir adaptör satın alın.
- Su basıncını ölçmek için bir su basıncı ölçer kullanın ve 0,14 MPa ile 0,8 MPa arasında olduğunu onaylayın.
- Kurulumu başlamadan önce evinizdeki ana su vanasını kapatın ve borulardaki tüm suyun boşaltıldığından emin olun.
- Ana istasyonu sıcak su kaynağına bağlamayın.
- Kurulumu başlamadan önce lütfen ana istasyonu fişten çıkararak ana istasyonun güç kaynağına bağlı olmadığından emin olun.


Kurulum Uyarıları

- Kurulum yeri doğrudan güneş ışığına ve suya maruz kalmamalıdır.
- Konumun su kaynağına ve zemin drenajına yakın olması önerilmektedir.
- Ana istasyon ile yuva arasındaki mesafenin en fazla 1,5 metre olması önerilmektedir.
- Ana istasyona önden 60 cm'den yakın olan nesnelere kaldırın.
- Ana istasyonu iyi bir 2.4 GHz kablosuz bağlantı sinyali olan bir konuma yerleştirin.

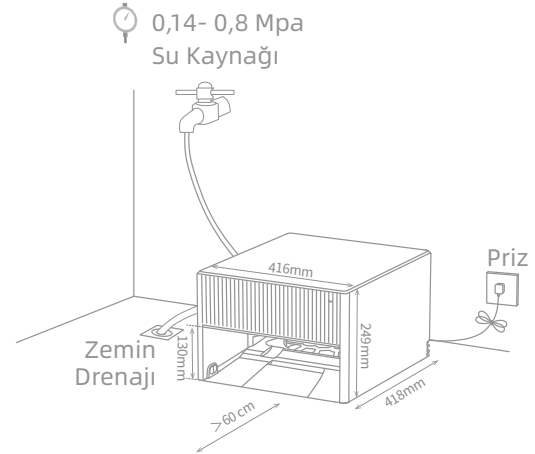

Kurulum Talimatları

Tamamlanmış Kurulum

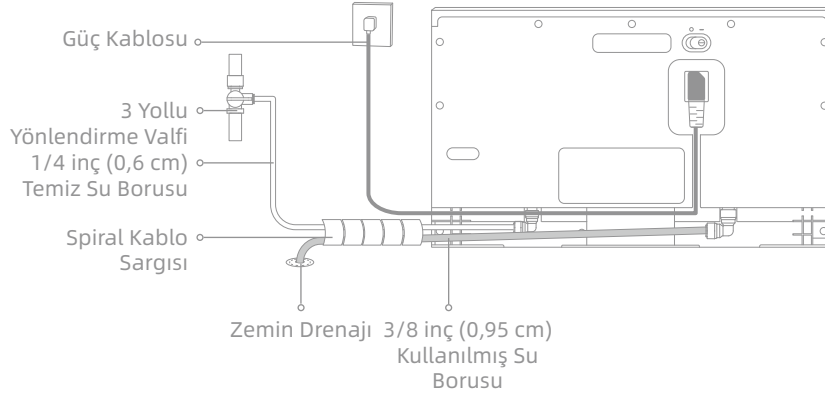


Not:

- Bu kılavuzdaki çizimler yalnızca referans amaçlı olarak verilmiştir. Lütfen gerçek kurulum durumunu esas alın.
- Kullanılmış su borusunun kurulum yüksekliğinin 80 cm'den yüksek olmaması önerilir.

Bağlantı Kitleme Klipsi Nasıl Kurulur

Bağlantı kitleme klipsinin kol yönünü çizimle tutarlı olacak bir şekilde ayarlayın ve ardından çizimde gösterildiği gibi klipsi boşluk boyunca aşağıya doğru bastırın.

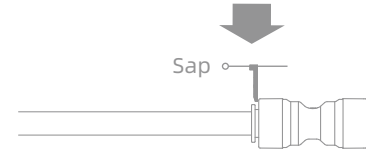


Not: Kurulumla başlamadan önce, tüm bağlantı aksesuarlarının sıkıca takılmış olduğundan emin olun.

Kurulum Talimatları


Gerekli Aletler (ürünle birlikte verilmez)




Teflon Bant




Açılı Valf



Bıçak




Şerit Metre




İngiliz Anahtarı

Kurulum Talimatları

① Kullanılmış Su Borusunu Bağlayın

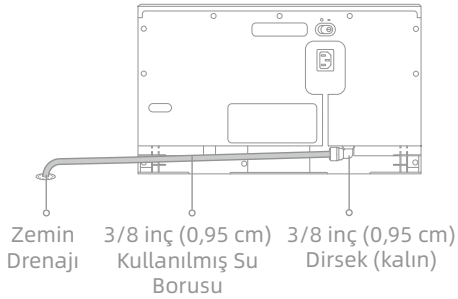

② Temiz Su Borusunu Bağlayın

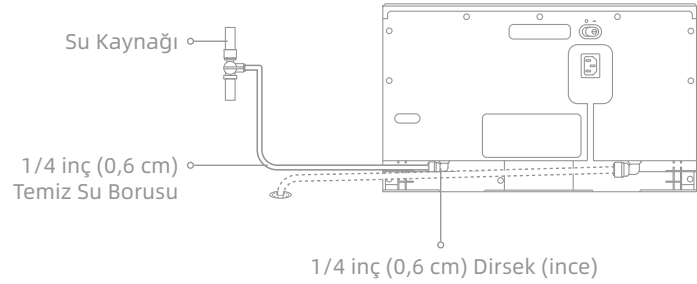

Not:

- Kurulmadan önce, yerleşik sızıntı önleme başlığı çıkarmak için lütfen dirsek üzerindeki tutucu halkaya sıkıca bastırın.
- Kullanılmış su borusunun kurulum yüksekliğinin 80 cm'den yüksek olmaması önerilir.

Kurulum Talimatları

③ 3 Yollu Yönlendirme Valfini takın


Not:

- Kurulumla başlamadan önce evinizdeki ana su vanasını kapatın ve borulardaki tüm suyun boşaltıldığından emin olun.
- Kurulumdan önce sızdırmazlık halkasının yerinde olup olmadığını kontrol edin. Değilse sızmayı önlemek için, birleştirilen tüm erkek dişli tesisat elemanlarının vidalama yönünde 6-9 tur olmak üzere bir Teflon bantla sıkıca sarılması gereklidir.
- 3 yollu yönlendirme valfi takılmadan önce su kaynağına bir açılı valf takılması önerilir.
- Gerekirse takmak için bir İngiliz anahtarı kullanın.

Tamamlanmış Kurulum


1. Seçenek

- Erkek Dişli Tesisat Elemanı ile




2. Seçenek

- Dişi Dişli Tesisat Elemanı ile




1. Seçenek - Erkek Dişli Tesisat Elemanı ile Su Kaynağı

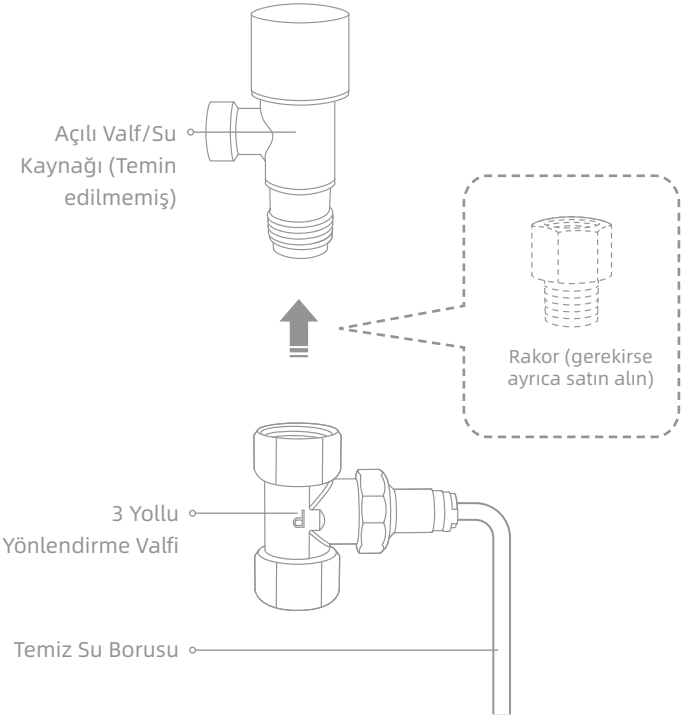

Kurulum Talimatları


2. Seçenek - Dişi Dişli Tesisat Elemanı ile Su Kaynağı

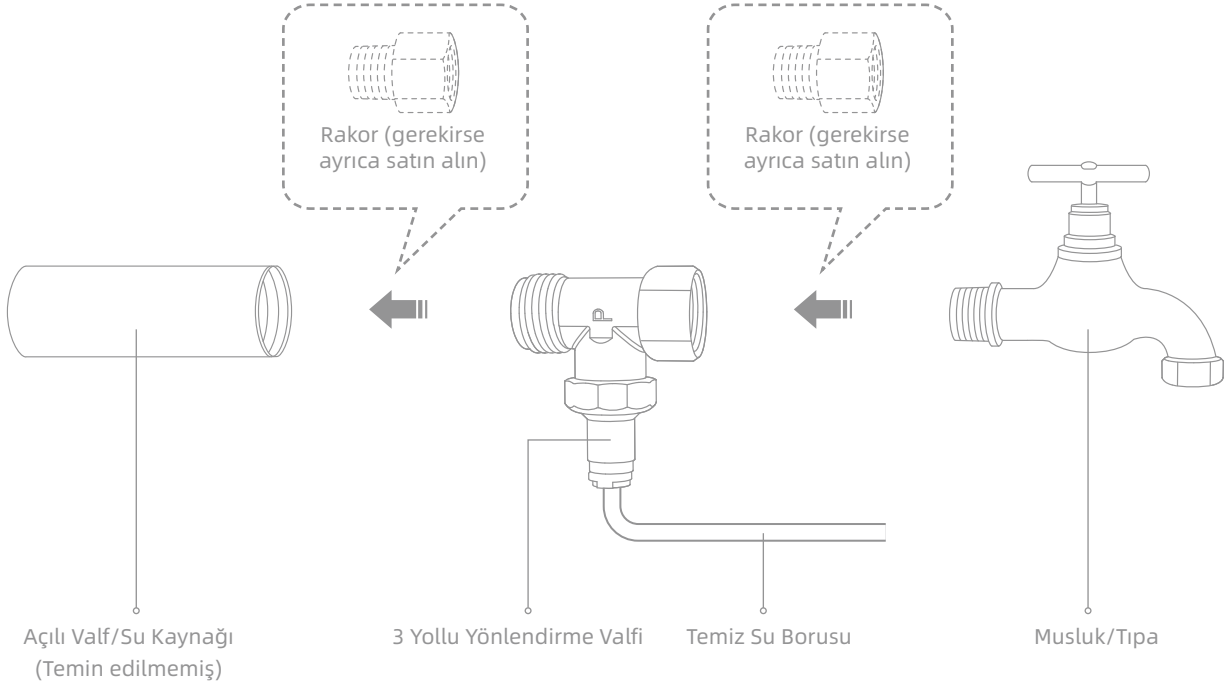


Kurulum Talimatları

④ Su Borularını ve Kabloları Düzenleyin


1. Su borularını ve kabloları kablo düzenleyici ile kelepçeleysin.

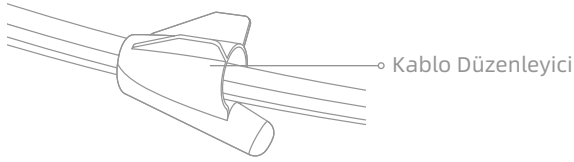

2. Kablo düzenleyicinin alt kısmını, spiral kablo sargısına geçirin.

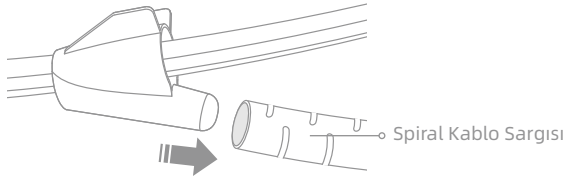

3. Kablo düzenleyiciyi geriye doğru çekerek su borularını ve kabloları sarın.

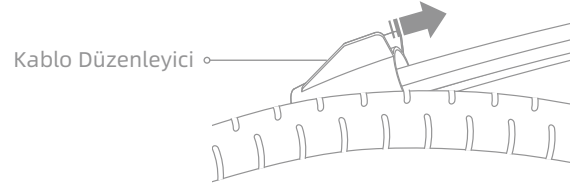


Kurulumun Etkisini Test Edin

Test Yöntemi

1. Test etmeden önce, lütfen ana istasyona güç verin ve ardından evdeki ana su vanasını ve açılı valfi açın.
2. Uygulamayı indirmek ve kurmak için kullanıcı kılavuzuna başvurun. Kurulmdan sonra, uygulamada bir açılır komut görünecektir, lütfen talimatlara uyarak test adımlarını tamamlayın.
3. Otomatik su doldurma ve boşaltma işlemlerini başarıyla yapıp yapamadığını test etmek için ana istasyonu tekrar bağlayın ve test edin.

Not: Lütfen uygulamanın en son sürümüne dayalı olarak talimatları izleyin.

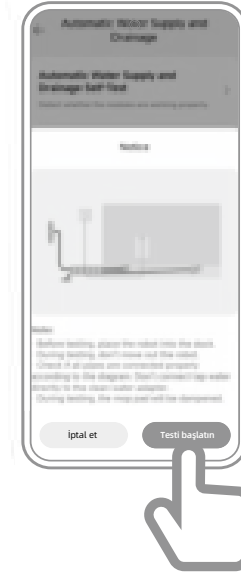

KURULUM TAMAMLANDI

Kullanım

Aç / Kapat

Robotu açmak için güç düğmesini 3 saniye süreyle basılı tutun. Güç göstergesi yanar durumda kalır. Robotun şarj kontaklarını ana istasyonunkilerle hizalayarak robotu ana istasyona da yerleştirebilirsiniz; robot otomatik olarak açılır ve şarj olmaya başlar. Robotu kapatmak için robotu ana istasyondan uzaklaştırın ve güç düğmesini 3 saniye süreyle basılı tutun.

Hızlı Harita Çıkarma

Ağı ilk kez yapılandırdıktan sonra, hızlı bir şekilde bir harita oluşturmak için uygulamadaki talimatları izleyin. Robot, temizliğe başlamadan harita çıkarmaya başlayacaktır. Robot ana istasyona döndüğünde, haritalandırma işlemi tamamlanmış olup harita otomatik olarak kaydedilir.

Duraklatma/Uyku

Robot çalışırken herhangi bir düğmeye basarak robotu duraklatabilirsiniz.

Robotun duraklama süresi 10 dakikayı aştığı takdirde otomatik olarak uyku moduna geçer. Robot üzerindeki tüm göstergeler kapanır. Robot üzerindeki herhangi bir düğmeye basarak ya da uygulamayı kullanarak robotu uyandırabilirsiniz.

Not: Robot duraklatılıp ana istasyona yerleştirildiği takdirde geçerli temizlik işlemi sona erer.

Temizliğe Otomatik Olarak Devam Etme

Pil çok azaldığı takdirde robot şarj olmak için otomatik olarak ana istasyona döner. Uygun pil seviyesine kadar şarj olduktan sonra, henüz tamamlanmamış olan temizlik görevlerine kaldığı yerden devam eder.

Not: Bu işlevi kullanmak için lütfen uygulama içinde etkinleştirin.

Rahatsız Etmeyin (DND) Modu

Robot Rahatsız Etmeyin (DND) moduna ayarlandığında robotun temizliğe kaldığı yerden devam etmesi engellenir. DND modu, fabrika ayarlarında varsayılan olarak devre dışıdır. Uygulama üzerinden DND modunu etkinleştirebilir veya DND süresini değiştirebilirsiniz. DND süresi, varsayılan olarak 22:00-8:00 olarak ayarlanmıştır.

Not:

- Programlanmış temizlik görevleri DND süresi boyunca normal bir şekilde yerine getirilir.
- DND süresi sona erdikten sonra robot temizliğe kaldığı yerden devam eder.

Robotu Tekrar Başlatmak

Robot yanıt vermeyi durdurursa veya kapatılamazsa cihazı zorla kapatmak için güç düğmesini 10 saniye basılı tutun. Ardından robotu açmak için güç düğmesini 3 saniye basılı tutun.

Kullanım


Süpürme ve Paspaslama

Not:

- Paspas tertibatını ilk kez kullanıyorsanız robot varsayılan olarak "Süpürme ve Paspaslama" görevini yerine getirir.
- Kullanım sırasında, ana istasyon temiz su beslemesi yapar ve kullanılmış suyu otomatik olarak boşaltır.

1. Temizliğe başlama

Robot üzerindeki güç düğmesine basarak veya uygulamayı kullanarak robotu ana istasyondan başlatın. Robot en uygun temizlik rotasını planlayacak ve oluşturulan haritaya göre temizlik görevini uygulayacaktır.




Not:

- Robot paspaslamaya başlamadan önce paspas pedleri temizlenecektir, lütfen biraz bekleyin.
- Robotun temizlikten sonra ana istasyona kolayca dönebilmesi için robotun ana istasyondan başlatılması önerilir. Çalışma sırasında ana istasyonu, su siperini veya su siperi filtresini hareket ettirmeyin.
- Paspas pedi yıkama görevleri için sıcak suyla temizlik uygulama üzerinden etkinleştirilebilir ve tüm modlarda geçerlidir. Yanmamak için fonksiyon açıkken su çıkışına dokunmayın.

2. Otomatik paspas yıkama

Temizlik sırasında, robot uygulamada belirlenen paspas pedi temizleme sıklığına göre paspas pedlerini yıkamak için otomatik olarak ana istasyona döner. Ana istasyon robotun su haznesini otomatik olarak yeniden doldurur ve robot temizliğe kaldığı yerden devam eder.

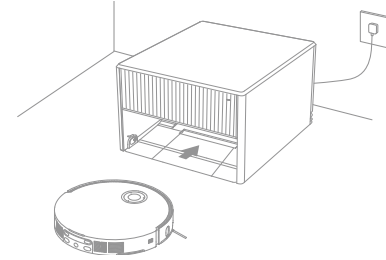

3. Toz kutusunun otomatik olarak boşaltılması ve paspas pedlerinin yıkayıp kurutulması

Robot bir temizlik görevini tamamladıktan ve şarj olmak için ana istasyona döndükten sonra, ana istasyon otomatik olarak toz kutusunu boşaltır. Ardından paspas pedlerini yıkayıp kurutur.

Not:

- Otomatik boşaltma işlevi uygulamada kapalı olduğu takdirde ana istasyon toz kutusunu otomatik olarak boşaltmaz.
- Ana istasyon, toz kutusunu uygulamadaki ayara göre boşaltır.

Rutin Bakım

Parçalar

Robotun düzgün çalışmaya devam etmesi amacıyla rutin bakım için uygulamadaki aksesuar kullanımı bölümüne veya aşağıdaki tabloya bakılması önerilir.

Parça	Bakım Sıklığı	Değiştirme Süresi
Ana fırçalar	2 haftada bir	Her 6-12 ayda bir
Toz kutusu filtresi		Her 3-6 ayda bir
Yan fırça		
Paspas pedi tutucuları		/
Su siperi filtresi	Her 1 ila 2 ayda bir	/
Ana istasyon sinyal alanı	Ayda bir kez	
Şarj kontakları		
Otomatik Boşaltma Ağzıları		
Sarhoş tekerlek		
Çok yönlü tekerlek		
Kenar sensörü		
VersaLift sensörü		


Parça	Bakım Sıklığı	Değiştirme Süresi
3 Boyutlu Çift Hatlı Lazer Sensörler	Ayda bir kez	/
Tampon Penceresi		
Halı sensörü		
Uçurum sensörleri		
Tampon		
Robot otomatik su doldurma girişi		
Robotun alt kısmı	Gereken sıklıkta temizleyin	
Toz kutusu		
Ana tekerlekler		
Aralık ayakları	/	
Toz torbası		Her 1-3 ayda bir
Paspas pedleri		

Not: Bakım ve değiştirme sıklığı gerçek kullanıma bağlıdır. Özel koşullar nedeniyle istisnai bir durum meydana geldiği takdirde derhal bakım veya değiştirme önerilir.


Rutin Bakım

Su Siperi Filtresi


1. Paspas pedi temizliği tamamlandıktan sonra robotu çıkarın ve su siperi taban klipslerine bastırarak su siperi filtresini çıkarın.

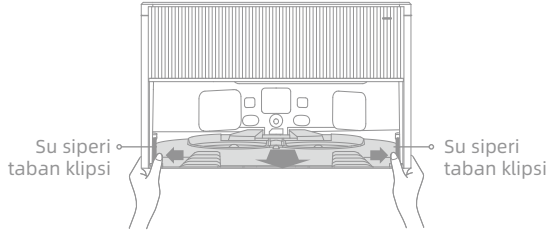

2. Su siperi filtresini çıkarın, temiz suyla durulayın ve silerek temizleyin.

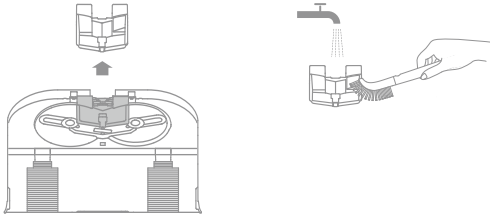


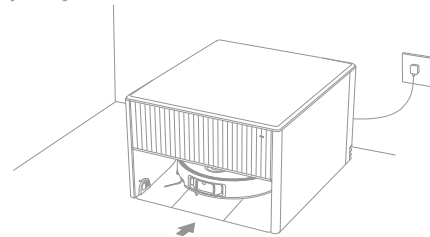
3. Öncelikle su siperi filtresini ardından su siperi tabanını yerine takın.

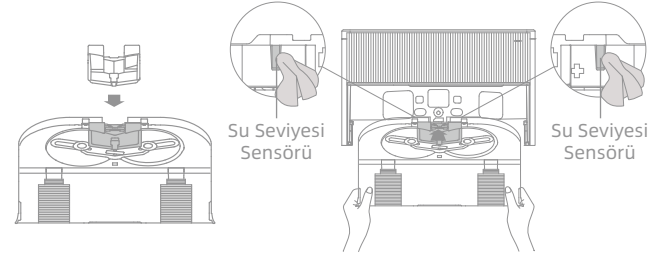

Not:

- Su seviyesi sensörlerinde su lekeleri kalmışsa su siperi tabanını yerine takmadan önce bu lekeleri yumuşak ve kuru bir bezle silin.
- Su siperi tabanını yerine takarken klik sesi duyduğunuzda her iki uçtaki klipslerin sıkıca yerlerine oturduğundan emin olun.


4. Robotu ana istasyona döndürmek için uygulamayı kullanın veya  düğmesine basın ya da robotu manuel olarak ana istasyona yerleştirin.




Rutin Bakım

Toz Torbası


1. Toz haznesi kapağını çıkarın.




2. Toz torbasını atın.

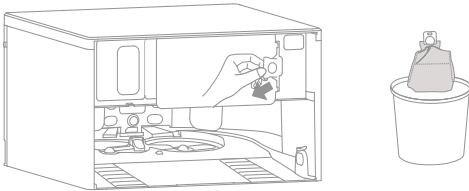

3. Filtredeki toz ve kalıntıları kuru bir bezle temizleyin.



4. Yeni bir toz torbası yerleştirin, ardından toz haznesi kapağını yerine takın.

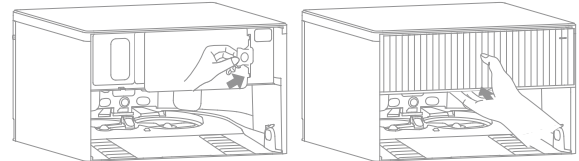


Not: Tutma Yeri yukarı doğru çektüğünüzde torba kapanarak toz ve artıkların kazara dökülmesini önler.


Rutin Bakım

Ana Fırçalar

1. Fırça muhafazası klipslerini içe doğru bastırarak fırça muhafazasını çıkarın ve fırçaları kaldırarak robottan çıkarın.

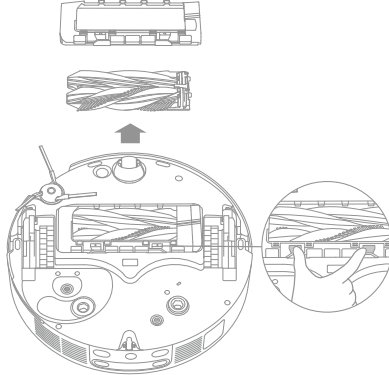


2. Fırçaları şekilde gösterildiği çekip çıkarın. Fırçalara dolaşmış saçları çıkarmak için verilen temizlik aracını kullanın. Fırçaları temizledikten sonra sağlam bir şekilde ana fırça tutucusuna takın ve yerlerine oturtun.

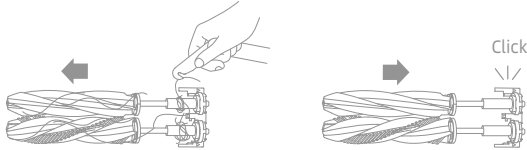


Not: Yaralanmayı önlemek için ana fırçaları çekip çıkarırken dikkatli olun.

3. Gösterilen oklar yukarı bakacak şekilde, ana fırça tutucusunu aşağıya doğru eğik bir şekilde yuvalara yerleştirin.

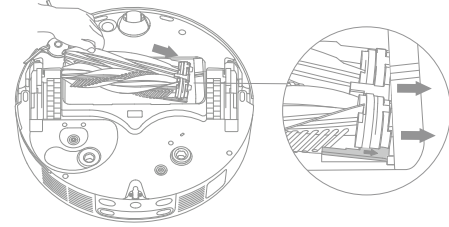


4. Fırça muhafazasının ön ucunu yuva ile hizalayın, aşağıya doğru eğik bir şekilde yerleştirin ve ardından bastırın yerine oturtun.



Rutin Bakım


Yan Fırça

Yan fırçanın vidalarını bir tornavidayla sökün, fırçadaki saçları temizleyin ve fırçayı geri takın.

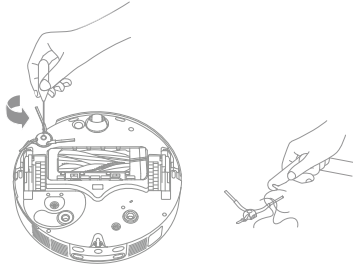


Paspas pedi tutucuları

Paspas pedi tutucuları çıkarın ve temizleyin.

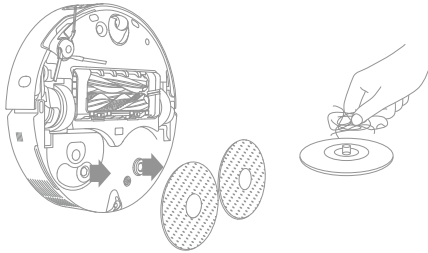

Çok Yönlü Tekerlek

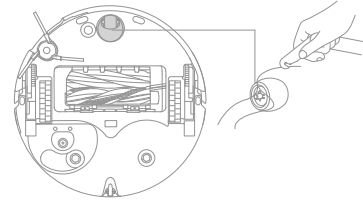


Not:

- Ufak tornavida gibi bir aletle çok yönlü tekerleğin aksını ve lastiğini ayırın. Aşırı güç kullanmayın.
- Çok yönlü tekerleği akan suyun altında yıkayıp tamamen kuruduktan sonra geri takın.


Rutin Bakım

Toz Kutusu ve Filtre


1. Robot kapağını çıkarın ve toz kutusu klipsine basarak toz kutusunu çıkarın.

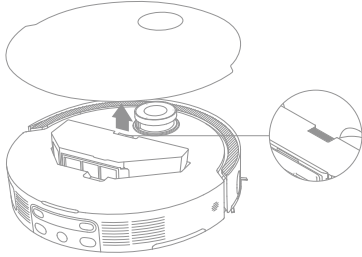

2. Toz kutusu filtresini çıkarın ve toz kutusunu boşaltın.

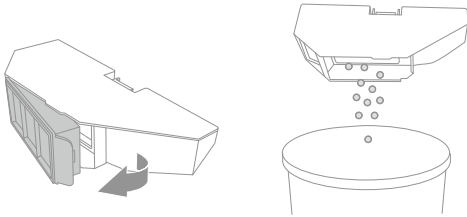


3. Kirleri çıkarmak için filtrenin sepetine hafifçe vurun.



Not: Hasar görmemesi için, filtreyi bir fırçayla, parmakla veya keskin nesnelere temizlemeye çalışmayın.

4. Toz kutusunu ve filtreyi yerlerine takmadan önce suyla yıkayın ve tamamen kurutun.

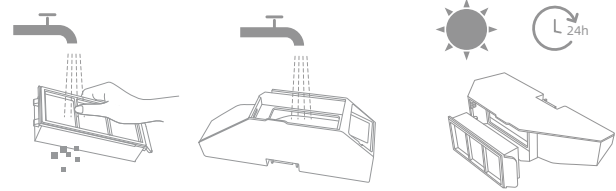


Not:

- Toz kutusunu ve filtreyi yalnızca temiz suyla yıkayın. Deterjan kullanmayın.
- Toz kutusunu ve filtreyi tamamen kurduktan sonra kullanın.

Rutin Bakım

Robot Sensörleri


Robot sensörlerini, aşağıdaki şekilde gösterildiği gibi yumuşak ve kuru bir bezle silin.

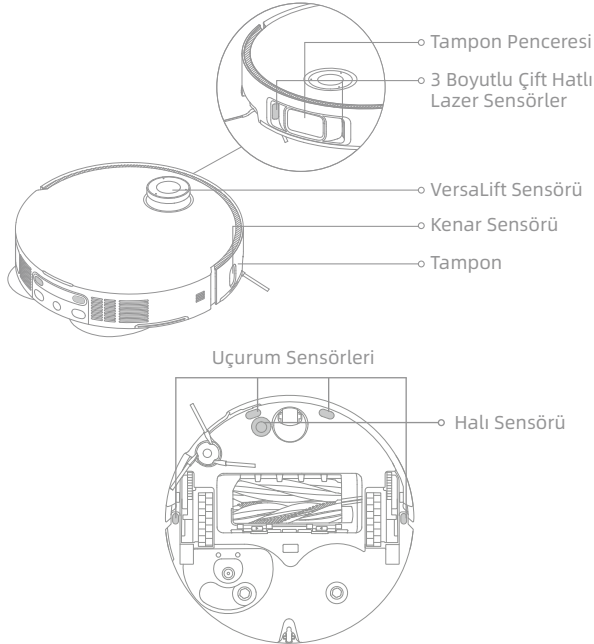

Not: Nemli bez, robot içindeki ve ana istasyondaki hassas parçalara zarar verebilir. Temizlik sırasında lütfen kuru bir bez kullanın.


Şarj Kontakları ve Sinyal Alanı

Şarj kontaklarını ve sinyal alanını yumuşak ve kuru bir bezle temizleyin.

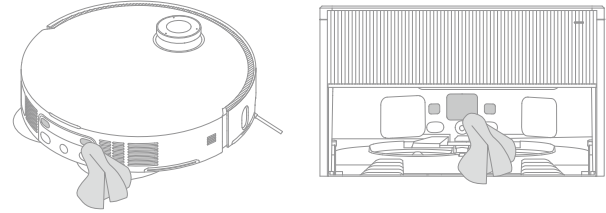

Otomatik Boşaltma Ağızları


Robotun ve ana istasyonun otomatik boşaltma ağzlarını yumuşak ve kuru bir bezle temizleyin.

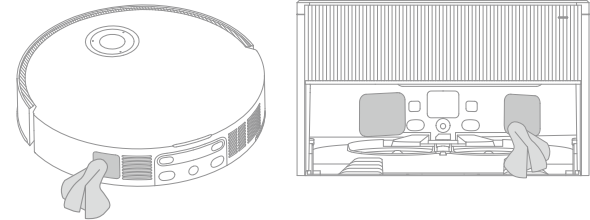

Rutin Bakım

Paspas Pedleri

Paspas pedlerini deęiřtirmek için paspas pedi tutuculardan çıkarın.

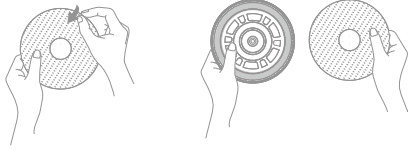

Pil


Robot, yüksek performanslı lityum iyon pil takımı içerir. En uygun pil performansını muhafaza etmek üzere lütfen günlük kullanım için şarjın yeterli olduğundan emin olun. Robot uzun süre kullanılmayacaksa kapatın ve kaldırın. Şarjın aşırı boşalmasından kaynaklanacak zararı önlemek için robotu en az her üç ayda bir yeniden şarj edin.

Sökme Talimatları


! YALNIZCA İADE DURUMUNDA GEREKLİDİR

1. Hem robotun hem ana istasyonun içinde kalan suyu boşaltmak için uygulama üzerinden su boşaltma işlevini etkinleştirin.


Not: Lütfen su siperi tabanını çıkarın ve su kalıp kalmadığını kontrol edin. Varsa silip kurulaşın ve su siperi tabanını tekrar yerine takın.




2. Toz haznesi kapağını çıkarın ve otomatik deterjan bölmesini dışa doğru çekin. Bölmenin üst kapağını açın ve kalan temizlik solüsyonunu dökün, ardından bölmeyi yerine takın.

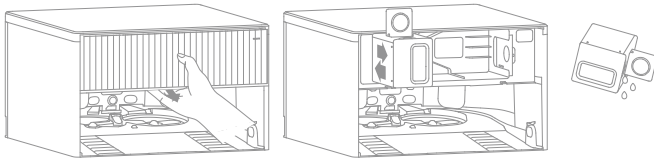

3. Sökmeden önce, ana istasyonu güçten ayırın, evinizdeki ana su vanasını kapatın.

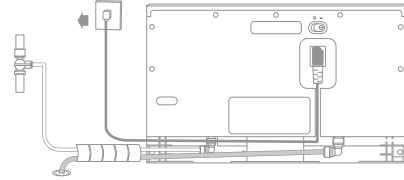

4. İlk olarak, bağlantı kilitleme klipsini çekin. Ardından, birleşme yerindeki tutucu halkaya bastırarak boruyu sökün. Dışarı akan suyu bir kap kullanarak yakalayın.

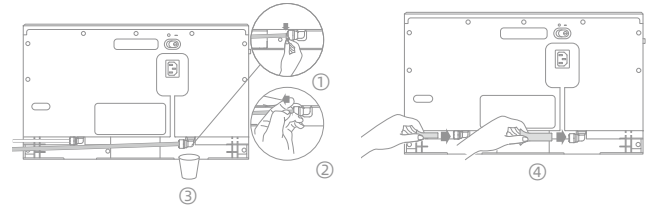


Not:

- Hasardan kaçınmak için su borusunu güçlü bir şekilde dışarıya çekmeyin.
- Paketleyip nakliye etmeden önce toz haznesi kapağındaki kare kapakları çıkarın; sızıntıyı önlemek için ana istasyonun arkasındaki dirsekleri kapatın.

Sorun giderme

Sorun	Çözüm
Robot açılmıyor.	Pil azalmış. Robotu istasyonda yeniden şarj edip tekrar deneyin. Pilin sıcaklığı çok düşük veya çok yüksek. Cihazın 32°F (0°C) ile 104°F (40°C) arasındaki bir sıcaklıkta çalıştırılması tavsiye edilir.
Robot şarj olmuyor.	Ana istasyon güce bağlı olmayabilir, lütfen güç kablosunun her iki ucunun da doğru şekilde takılı olduğundan emin olun. Ana istasyon üzerindeki şarj kontakları ve robot arasındaki temas zayıf olabilir, lütfen şarj kontaklarını temizleyin. Robotun konektöründe herhangi bir yabancı cisim olup olmadığını kontrol edip varsa çıkarın.
Robot kablosuz internete bağlanamıyor.	Kablosuz internet ağ şifresi yanlış olabilir. Kablosuz internet ağınıza bağlanmak için kullanılan şifrenin doğru olduğunu kontrol edin. Robot 5 GHz Kablosuz İnternet bağlantısını desteklemiyor. Robotun 2.4 GHz Kablosuz İnternet bağlantısına bağlı olduğundan emin olun. Kablosuz internet sinyali zayıf. Robotun, kablosuz internet kapsamı iyi olan bir alanda olduğundan emin olun. Robot yapılandırılmaya hazır olmayabilir. Lütfen uygulamadan çıkıp yeniden giriş yapın ve talimatları takip ederek tekrar deneyin.
Robot ana istasyonu bulamıyor ve geri dönemiyor.	Ana istasyonun güç bağlantısı kesilmiş veya istasyon robot orada değilken yerinden oynatılmış olabilir. Lütfen ana istasyonu güç kaynağına bağlayın veya robotu şarj olması için ana istasyonun üzerine yerleştirin. Ana istasyonun etrafında çok sayıda engel var. Ana istasyonu daha açık bir alana yerleştirin. Robotu yerinden oynatmak kendini yeniden konumlandırmasına neden olabilir, yeniden konumlandırma başarısız olursa tekrar bir harita oluşturacaktır. Robot ana istasyondan çok uzaktaysa kendi başına otomatik olarak geri dönemeyebilir, bu durumda robotu ana istasyona manuel olarak yerleştirmeniz gerekmektedir. Ana istasyonun sinyal alanını silerek toz veya kalıntıları giderin.
Robot ana istasyonun önünde takılı kalıyor ve istasyona geri dönemiyor.	Robotun takılmasını önlemek için ana istasyonun önündeki 60 cm mesafede bulunan engelleri kaldırın. Şarj olmak için döndüğü yolda engel olabilir, örneğin kapı kapalı olabilir. Ana istasyonun önündeki zemin aşırı ıslak ise robot kayabilir. Aşırı ıslaksa tekrar denemeden önce fazla suyu temizleyin. Ana istasyonun farklı bir yere taşınması ve tekrar denenmesi önerilir.
Robot kapanmıyor.	Robot şarj olurken kapatılamaz. Robotu ana istasyondan uzaklaştırmanız ve ardından kapatmak için güç düğmesini 3 saniye basılı tutmanız önerilir. Robot 1. adım uygulanarak kapatılmadığı takdirde robotu zorla kapatmak için güç düğmesini 10 saniye basılı tutun. Sorun devam ederse lütfen satış sonrası servis ile iletişime geçin.
Paspas pedi tutucusu anormal bir şekilde kalkmış.	Lütfen paspas pedi tutucusunu çıkarıp içine herhangi bir yabancı nesnenin takılı olup olmadığını kontrol edin ve robotu yeniden başlatmayı deneyin. Sorun devam ederse lütfen satış sonrası servis ekibiyle iletişime geçin.

Sorun giderme

Sorun	Çözüm
Şarj hızı düşük.	Pil azaldığında robotun tamamen şarj olması yaklaşık 4,5 saat sürer. Robotu belirtilen aralığın dışındaki sıcaklıklarda çalıştırırsanız şarj hızı otomatik olarak yavaşlayarak pil ömrünü uzatır. Hem robotun hem de istasyonun şarj kontakları kirli olabilir, lütfen kuru bir bezle silin.
Robot çalışırken gürültü artıyor.	Toz kutusu filtresinin tıkalı olup olmadığını kontrol edin. Tıkalıysa temizleyin veya değiştirin. Ana fırçaya veya toz kutusuna sert bir nesne takılmış olabilir. Sert nesne olup olmadığını kontrol edin ve varsa çıkarın. Ana fırça veya yan fırçaya bir şeyler takılmış olabilir. Yabancı nesne olup olmadığını kontrol edin ve varsa çıkarın. Emme modunu Standart veya Sessiz'e getirin.
Robot, belirlenen rotayı takip etmeden hareket ediyor.	Robot kullanılmadan önce güç kabloları ve terlikler gibi nesnelere düzenlenmelidir. Islak kaygan yüzeylerde çalışma ana tekerleğin kaymasına yol açar. Robotu kullanmadan önce ıslak yerlerin kurutulması önerilir. Robot üzerindeki tampon penceresini ve 3 boyutlu çift hatlı lazer sensörleri temiz ve görüş alanlarını açık tutmak için temiz, yumuşak bir bezle silin.
Robot, temizlenmesi gereken odaları atlıyor.	Temizlenecek odaların kapılarının açık olduğunu kontrol edin. Temizlenecek odanın önündeki alan ıslak veya kaygan olup robotun kaymasına ve anormal çalışmasına neden olabilir. Lütfen robotu kullanmadan önce yeri kurutmaya çalışın.
Robot şarj olduktan sonra temizliğe kaldığı yerden devam etmiyor.	Robotun Rahatsız Etmeyin (DND) moduna ayarlanmadığından emin olun, bu, temizliğin kaldığı yerden başlatılmasını engeller. Siz robotu manuel olarak ana istasyona yerleştirdikten veya uygulama ya da  düğmesi üzerinden robotu şarj olmaya gönderdikten sonra robot temizliğe kaldığı yerden devam etmez.
Su siperindeki su anormal seviyede.	Su siperi tabanını çıkarın, su siperi filtresinin etrafında tıkanıklık olup olmadığını kontrol edin ve temizleyin. Atık su tahliye çıkışının tıkalı olup olmadığını kontrol edin ve temizleyin. Temizlik solüsyonunu kontrol edin. Resmî olarak onaylı temizlik solüsyonundan başka bir sıvı kullanmayın.
Ana istasyon toz kutusunu otomatik olarak boşaltmıyor.	Toz haznesindeki toz torbasının dolu olup olmadığını kontrol edin. Toz torbası dolu değilse robotun, ana istasyonun veya toz kutusunun otomatik boşaltma ağızlarında herhangi bir tıkanıklık olup olmadığını kontrol edin. Tıkanıklık varsa gecikmeden temizleyin.

Daha fazla destek için bizimle <https://global.dreametech.com> üzerinden iletişime geçebilirsiniz

Teknik özellikler

Robot

Model	RLX86CE
Şarj Süresi	Yaklaşık 4,5 saat
Nominal Voltaj	14,4 V ---
Nominal Güç	75 W
Çalışma Frekansı	2400-2483,5 MHz
Maksimum Çıkış Gücü	<20 dBm

Bu ekipmanda, normal kullanım koşulları altında anten ile kullanıcının vücudu arasında en az 20 cm'lik mesafe olmalıdır.

Ana İstasyon/Şarj Yanaşma Noktası

Kapalı modda güç tüketimi: $\leq 0,3$ W

Bekleme modunda güç tüketimi: $\leq 0,5$ W (robot süpürge ana istasyondan/şarj yanaşma noktasından ayrıldıktan sonra 15 dakika içinde)

Robot Süpürge ve Ana İstasyon/Şarj Yanaşma Noktası

Ekipmanın, bekleme gereksinimleri, güç yönetimi işlevi veya pil bakım ihtiyaçları nedeniyle kablosuz ağ bağlantılarını devre dışı bırakma özelliği açısından bir bekleme modu veya diğer eşdeğer bir durumu yoktur. Ekipmanın güç tüketiminin, bu işlevsel gereksinimleri karşılayan diğer ekipman modellerinden daha yüksek olması muhtemeldir.

Ana İstasyon

Model	RBXE0307
Nominal Giriş	220-240 V ~ 50-60 Hz
Nominal Çıkış	20 V --- 2 A
Nominal Güç (toz boşaltma sırasında)	700 W
Nominal Güç (sıcak suyla temizlik sırasında)	1160 W
Nominal Güç (şarj ve kurutma sırasında)	87 W
Su Basıncı Aralığı	0,14- 0,8 Mpa

Not:

- Nominal Güç (sıcak suyla temizleme sırasında), temsili süre (su sıcaklığı 25°C) sırasındaki güç değeriyle belirlenir.
- Nominal Güç (şarj etme ve kurutma sırasında), tam yük süresindeki güç değerine göre belirlenir.

Pillerin Çıkarılması ve İmhası

Üründeki lityum-iyon pil, çevreye zararlı maddeler içerir. Pili atmadan önce, yetkin teknisyenler tarafından çıkarılmasını sağlayın ve uygun bir geri dönüşüm tesisinde imha edileceğinden emin olun.

- cihaz iskartaya çıkarılmadan önce pilleri çıkarılmalıdır;
- piller çıkarılırken cihaz şebeke elektriğinden ayrılmış olmalıdır;
- pil, güvenli bir şekilde imha edilmelidir.

DİKKAT:

Pili çıkarmadan önce, güç kablosunu ayırın ve pili olabildiğince fazla tüketin.

İhtiyaç fazlası piller uygun bir geri dönüşüm tesisinde imha edilmelidir.

Patlama risklerinin önüne geçmek için yüksek sıcaklıklı ortamlara maruz bırakmayın.

Kötü koşullar altında, pilden sıvı sızabilir. Temas meydana gelirse ilgili bölgeyi suyla yıkayın ve tıbbi yardım alın.

Çıkarma Kılavuzu:

1. Robotu ters çevirin, uygun bir aletle robotun arkasındaki vidaları sökün ve ardından kapağı çıkarın.
2. Pili çıkarmak için pil ile PCB kartı arasındaki bağlantı uçlarını çıkarın.

WEEE Bilgileri



Bu sembolü taşıyan tüm ürünler elektrikli ve elektronik cihaz atığı (2012/19/AB sayılı direktifteki anlamıyla WEEE) kapsamında olup sınıflandırılmamış ev atıklarıyla karıştırılmamalıdır. Bunun yerine, atık cihazınızı, atık elektrikli ve elektronik cihazların geri dönüşürülmesi için hükümet veya yerel yetkililer tarafından belirlenmiş olan toplama noktasına teslim ederek insan sağlığını ve çevreyi korumalısınız. Doğru imha ve geri dönüşüm, çevre ve insan sağlığı üzerindeki olası olumsuz sonuçların engellenmesine yardımcı olacaktır. Bu tür toplama noktalarının konumu, şartları ve koşulları hakkında daha fazla bilgi almak için lütfen montaj yetkilisiyle veya yerel yetkililerle iletişime geçin.